

**PRZEPUSTY MEMBRANOWE KES**

28630.4

KES 13/24 Screw Mount Cable Entry Black



- Średnice kabli od 3.2mm do 20.5mm
- Stopień ochrony IP66
- Materiał: poliamid 6.6 wzmocniony włóknem szklanym
- Certyfikat ECOLAB - agresywne środki czyszczące
- Wolne od halogenu i silikonu

## OPIS PRODUKTU

**SPECYFIKACJA TECHNICZNA**

Certyfikat NEMA	4x
Długość	149,6 mm
Długość otworu pod przepust	112 mm
Klasa palności	V-0
Kod taryfy celnej	39259020
Kolor	Czarny
Kraj pochodzenia	DE
Liczba otworów montażowych	4 szt
Liczba otworów na kable	13 szt
Masa	109,1 g
Materiał	Poliamid 6.6
Materiał uszczelek	TPE
Max. temperatura pracy	90 °C
Min. temperatura pracy	-40 °C
Montaż	Śrubowy
Number of cables x cable diameter	10 x 3.2mm-6.3mm, 3 x 16.0mm-20.5mm
Rozmiar śrub montażowych	M5
Średnica otworów montażowych	5,5 mm
Standard cUL	C22.2 No. 14-18
Standard UL	UL 508A
Stopień ochrony IP	IP66

<b>Szerokość</b>	58 mm
<b>Szerokość otworu pod przepust</b>	36 mm
<b>Type</b>	KES
<b>Wall thickness</b>	N/A
<b>Wielkość opakowania</b>	10 szt
<b>Wolny od halogenu</b>	Tak
<b>Wolny od silikonu</b>	Tak
<b>Wysokość ramki</b>	14,5 mm
<b>Wzmocnienie włóknem szklanym</b>	Tak
<b>Zalecany moment dokręcania</b>	3



You can choose one of three attachment options to fit your requirements

1. Screw-on mount



The KES (without threaded bush) is screwed from the outside onto the housing wall.

2. Screw-on mount with threaded bushes and latching clips



Using the latching clips, the KES-G8 latches onto the outside of the housing wall. It is then screwed on from the inside, through the housing wall, using the integrated threaded bushes.

3. Latched (snap-on) mount using latching hooks




The KES-R is latched from outside to the housing wall using the latching clips.

KES 13/24

10x Ø3.2 - 6.3mm

3x Ø16 - 20.5mm

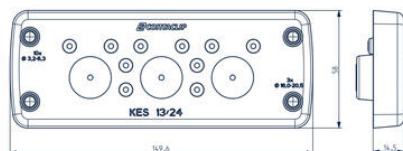

Panel cut-out  
for wall thickness  
1.5 - 2 mm  
(for snap-on attachment)



You can choose one of three attachment options to fit your requirements

1. Screw-on mount



The KES (without threaded bush) is screwed from the outside onto the housing wall.

2. Screw-on mount with threaded bushes and latching clips



Using the latching clips, the KES-G8 latches onto the outside of the housing wall. It is then screwed on from the inside, through the housing wall, using the integrated threaded bushes.

3. Latched (snap-on) mount using latching hooks



The KES-R is latched from outside to the housing wall using the latching clips.