

SENDIX 5863/5883, OPTYCZNY, WIELOBROTOWY, SSI, Ø58 MM

Enkodery wielobrotowe absolutne optyczne

SERIE 5863

- Średnica zewnętrzna: Ø 58 mm
- Maks. średnica wałka: Ø 10 mm. Maks. średnica otworu: Ø 15 mm
- Maks. rozdzielczość: 17 bitów ST + 12 bitów MT
- SSI, BiSS, + 2048 ppr SinCos, + 2048 ppr RS422
- Safety-Lock™



OPIS PRODUKTU

Sendix 5863/5883 is a multivariate sensor with SSI / BiSS interface in robust design. Thanks to the construction of Safety-Lock™ as well as the fully cast housing, the sensor is able to handle even the more demanding applications where there are high demands on the sensor. The wide temperature range combined with the high enclosure class allows the sensor to be used outdoors as well as applications where large temperature changes occur. Sendix 5863/5883 has LED indication which facilitates diagnosis of the sensor and a set button that facilitates calibration.

W celu określenia numeru katalogowego proszę o zapoznanie się z poniższymi informacjami.

Order code		8.5863		.XXXXX		.XX2X				
Shaft version		Type	a	b	c	d	e	f	g	h
a Flange										
1 = clamping flange, IP65		ø 58 mm [2.28"]								
3 = clamping flange, IP67		ø 58 mm [2.28"]								
2 = synchro flange, IP65		ø 58 mm [2.28"]								
4 = synchro flange, IP67		ø 58 mm [2.28"]								
5 = square flange, IP65		□ 63.5 mm [2.5"]								
7 = square flange, IP67		□ 63.5 mm [2.5"]								
6 = servo flange, IP65		ø 63.5 mm [2.5"] ¹⁾								
8 = servo flange, IP67		ø 63.5 mm [2.5"] ¹⁾								
b Shaft (ø x L), with flat										
1 = 6 x 10 mm [0.24 x 0.39"] ²⁾										
2 = 10 x 20 mm [0.39 x 0.79"] ³⁾										
3 = 1/4" x 7/8"										
4 = 3/8" x 7/8"										
c Interface / power supply										
1 = SSI, BiSS / 5 V DC										
2 = SSI, BiSS / 10 ... 30 V DC										
3 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC										
4 = SSI, BiSS + 2048 ppr. SinCos / 10 ... 30 V DC										
5 = SSI, BiSS / 5 V DC, with sensor output										
6 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC, with sensor output										
7 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 5 V DC										
8 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 10 ... 30 V DC										
9 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 5 V DC, with sensor output										
d Type of connection										
1 = axial cable, 1 m [3.28'] PVC										
A = axial cable, special length PVC *)										
2 = radial cable, 1 m [3.28'] PVC										
B = radial cable, special length PVC *)										
3 = axial M23 connector, 12-pin										
4 = radial M23 connector, 12-pin										
5 = axial M12 connector, 8-pin ⁴⁾										
6 = radial M12 connector, 8-pin ⁴⁾										
*) Available special lengths (connection types A, B):										
2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']										
order code expansion .XXXX = length in dm										
ex.: 8.5863.112A.G323.0030 (for cable length 3 m)										
e Code										
B = SSI, binary										
C = BiSS, binary										
G = SSI, gray										
f Resolution ⁵⁾										
A = 10 bit ST + 12 bit MT										
1 = 11 bit ST + 12 bit MT										
2 = 12 bit ST + 12 bit MT										
3 = 13 bit ST + 12 bit MT										
4 = 14 bit ST + 12 bit MT										
7 = 17 bit ST + 12 bit MT										
g Inputs / outputs ⁵⁾										
2 = SET, DIR input										
additional status output										
h Options (service)										
1 = no option										
2 = status LED										
3 = SET button and status LED										
Optional on request										
- Ex 2/22 ⁶⁾										
- other singleturn resolutions										
- surface protection salt spray tested										
- seawater resistant (stainless steel V4A)										
Salt spray tested / stainless steel V4A as standard types (deliverable as from 1 unit)										
		salt spray tested:		8.5863.32X6.XX22-C				stainless steel V4A:		
								8.5863.32X6.XX22-V4A		
								1.4404		

Order code

Hollow shaft

8.5883

Type

X

X

X

X

.

X

X

2

X

a

b

c

d

.

e

f

g

h

a Flange

1 = with spring element, long, IP65

2 = with spring element, long, IP67

3 = with stator coupling, IP65 ø 65 mm [2.56"]

4 = with stator coupling, IP67 ø 65 mm [2.56"]

5 = with stator coupling, IP65 ø 63 mm [2.48"]

6 = with stator coupling, IP67 ø 63 mm [2.48"]

b Through hollow shaft

3 = ø 10 mm [0.39"]

4 = ø 12 mm [0.47"]

5 = ø 14 mm [0.55"]

8 = ø 3/8"

9 = ø 1/2"

Blind hollow shaft

(insertion depth max. 30 mm [1.18"])

6 = ø 15 mm [0.59"]

c Interface / power supply

1 = SSI, BiSS / 5 V DC

2 = SSI, BiSS / 10 ... 30 V DC

3 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC

4 = SSI, BiSS + 2048 ppr. SinCos / 10 ... 30 V DC

5 = SSI, BiSS / 5 V DC, with sensor output

6 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC, with sensor output

7 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 5 V DC

8 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 10 ... 30 V DC

9 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 5 V DC, with sensor output

d Type of connection

2 = radial cable, 1 m [3.28'] PVC

B = radial cable, special length PVC *)

E = tangential cable, 1 m [3.28'] PVC

F = tangential cable, special length PVC *)

4 = radial M23 connector, 12-pin

6 = radial M12 connector, 8-pin ²⁾

*) Available special lengths (connection types B, F):
2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']
order code expansion .XXXX = length in dm
ex.: 8.5883.542B.G323.0030 (for cable length 3 m)

e Code

B = SSI, binary

C = BiSS, binary

G = SSI, gray

f Resolution ¹⁾

A = 10 bit ST + 12 bit MT

1 = 11 bit ST + 12 bit MT

2 = 12 bit ST + 12 bit MT

3 = 13 bit ST + 12 bit MT

4 = 14 bit ST + 12 bit MT

7 = 17 bit ST + 12 bit MT

g Inputs / outputs ¹⁾

2 = SET, DIR input

additional

status output

h Options (service)

1 = no option

2 = status LED

3 = SET button and

status LED

Optional on request

- Ex 2/22 (not for type of connection E, F) ³⁾

- other singleturn resolutions

- surface protection salt spray tested

- seawater resistant (stainless steel V4A)

Salt spray tested / stainless steel V4A as standard types (deliverable as from 1 unit)

salt spray tested:

8.5883.24X6.XX22-C

8.5883.25X6.XX22-C

V4A


1.4404

stainless steel V4A:

8.5883.24X6.XX22-V4A


SPECYFIKACJA TECHNICZNA

Max. temperatura pracy	90 °C
Min. temperatura pracy	-40 °C
Montaż	Wał
Napięcie zasilania DC max.	30 V DC
Napięcie zasilania DC min.	5 V DC
Podłączenie	Kabel, Złącze M12, Złącze M23
Rozdzielczość MT	Max. 12 bit
Średnica obudowy	58 mm
Średnica wału max	10 mm
Średnica wału min	6 mm
Stopień ochrony IP	IP65, IP67
Typ czujnika	Absolutny
Wersja	Wielobrotowy
Wyjście	SSI

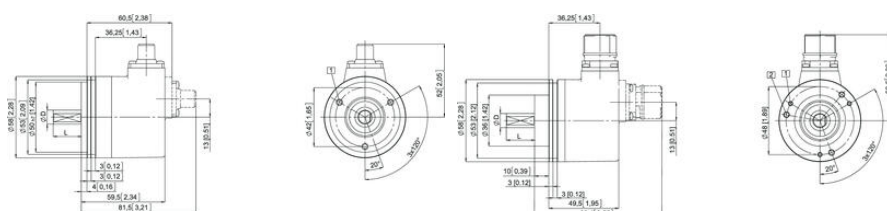

Interface	Type of connector	Features	Cable (isolate unused wires individually before initial start-up)
1, 2	1, 2, A, B, E, F	SET, DIR, Status	Signal: 0 V +V - C+ - C- D+ D- SET DIR Stat N/C N/C H Cable colour: WH BN GN YE GF PK BU RD BK - - - shield
Interface	Type of connector	Features	M23 connector
1, 2	3, 4	SET, DIR, Status	Signal: 0 V +V - C+ - C- D+ D- SET DIR Stat N/C N/C H Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Interface	Type of connector	Features	Cable (isolate unused wires individually before initial start-up)
5	1, 2, A, B, E, F	SET, DIR, Status sensor output	Signal: 0 V +V - C+ - C- D+ D- SET DIR Stat N/C N/C (Stam) (Stam) H Cable colour: WH BN GN YE GF PK BU RD BK - - - shield
Interface	Type of connector	Features	M23 connector
5	3, 4	SET, DIR, Status sensor output	Signal: 0 V +V - C+ - C- D+ D- SET DIR Stat N/C N/C (Stam) (Stam) H Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Interface	Type of connector	Features	Cable (isolate unused wires individually before initial start-up)
3, 4, 7, 8	1, 2, A, B, E, F	SET, DIR, SinCos or inc. RS422	Signal: 0 V +V - C+ - C- D+ D- SET DIR A X B B H Cable colour: WH BN GN YE GF PK BU RD BK VT GF PK RD-BU shield
Interface	Type of connector	Features	M23 connector
3, 4, 7, 8	3, 4	SET, DIR, SinCos or inc. RS422	Signal: 0 V +V - C+ - C- D+ D- SET DIR A X B B H Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Interface	Type of connector	Features	Cable (isolate unused wires individually before initial start-up)
6	1, 2, A, B, E, F	SinCos or inc. RS422 sensor output	Signal: 0 V +V - C+ - C- D+ D- A X B B (Stam) (Stam) H Cable colour: WH BN GN YE GF PK BU RD BK VT GF PK RD-BU shield
Interface	Type of connector	Features	M23 connector
6	3, 4	SinCos or inc. RS422 sensor output	Signal: 0 V +V - C+ - C- D+ D- A X B B (Stam) (Stam) H Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Interface	Type of connector	Features	M17 connector
1, 2	5, 6	SET, DIR	Signal: 0 V +V - C+ - C- D+ D- SET DIR H Pin: 1 2 3 4 5 6 7 8 PH

+V Encoder power supply +V DC
0 V Encoder power supply ground GND (0 V)
0 Vaux / +Vaux Using the sensor outputs of the encoders, the voltage present can be measured and if necessary increased accordingly.
C+ C- Click signal
D+ D- Data signal
A, B Incremental output channel A (A cosine)
B, B Incremental output channel B (sine)
SET Set input. The current position becomes defined as position zero.
DIR Direction input. If this input is active, output values are counted backwards (decreased) when the shaft is turning clockwise.
Stat Status output
PH Plug connector housing (shield)



Interface	Type of connector	Features	Cable (isolate unused wires individually before initial start-up)
1, 2	1, 2, A, B, E, F	SET, DIR, Status	Signal: 0 V +V - C+ - C- D+ D- SET DIR Stat N/C N/C H Cable colour: WH BN GN YE GF PK BU RD BK - - - shield
Interface	Type of connector	Features	M23 connector
1, 2	3, 4	SET, DIR, Status	Signal: 0 V +V - C+ - C- D+ D- SET DIR Stat N/C N/C H Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Interface	Type of connector	Features	Cable (isolate unused wires individually before initial start-up)
5	1, 2, A, B, E, F	SET, DIR, Status sensor output	Signal: 0 V +V - C+ - C- D+ D- SET DIR Stat N/C N/C (Stam) (Stam) H Cable colour: WH BN GN YE GF PK BU RD BK - - - shield
Interface	Type of connector	Features	M23 connector
5	3, 4	SET, DIR, Status sensor output	Signal: 0 V +V - C+ - C- D+ D- SET DIR Stat N/C N/C (Stam) (Stam) H Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Interface	Type of connector	Features	Cable (isolate unused wires individually before initial start-up)
3, 4, 7, 8	1, 2, A, B, E, F	SET, DIR, SinCos or inc. RS422	Signal: 0 V +V - C+ - C- D+ D- SET DIR A X B B H Cable colour: WH BN GN YE GF PK BU RD BK VT GF PK RD-BU shield
Interface	Type of connector	Features	M23 connector
3, 4, 7, 8	3, 4	SET, DIR, SinCos or inc. RS422	Signal: 0 V +V - C+ - C- D+ D- SET DIR A X B B H Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Interface	Type of connector	Features	Cable (isolate unused wires individually before initial start-up)
6	1, 2, A, B, E, F	SinCos or inc. RS422 sensor output	Signal: 0 V +V - C+ - C- D+ D- A X B B (Stam) (Stam) H Cable colour: WH BN GN YE GF PK BU RD BK VT GF PK RD-BU shield
Interface	Type of connector	Features	M23 connector
6	3, 4	SinCos or inc. RS422 sensor output	Signal: 0 V +V - C+ - C- D+ D- A X B B (Stam) (Stam) H Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Interface	Type of connector	Features	M17 connector
1, 2	5, 6	SET, DIR	Signal: 0 V +V - C+ - C- D+ D- SET DIR H Pin: 1 2 3 4 5 6 7 8 PH

+V Encoder power supply +V DC
0 V Encoder power supply ground GND (0 V)
0 Vaux / +Vaux Using the sensor outputs of the encoders, the voltage present can be measured and if necessary increased accordingly.
C+ C- Click signal
D+ D- Data signal
A, B Incremental output channel A (A cosine)
B, B Incremental output channel B (sine)
SET Set input. The current position becomes defined as position zero.
DIR Direction input. If this input is active, output values are counted backwards (decreased) when the shaft is turning clockwise.
Stat Status output
PH Plug connector housing (shield)

