

Order code with encoder (analog, scalable with limit switch function)

D8.4D1 . XXXX . M1XX . XXXX
Type **a** **b** **c** **d** **e**

Standard variants are represented **bold underlined**

a *Measuring range*
0800 = 8 000 mm
1000 = 10 000 mm
1200 = 12 000 mm
1500 = 15 000 mm
2000 = 20 000 mm
2500 = 25 000 mm
3000 = 30 000 mm
3500 = 35 000 mm
4000 = 40 000 mm
4250 = 42 500 mm

b *Encoder used*
M1 = Sendix M5861, absolute ¹⁾

c *Output circuit*
depends on the encoder used

d *Type of connection*
depends on the encoder used

e *Resolution / Protocol / Options*
depends on the encoder used

Optional on request

- Other measuring ranges
- Cable diameter 1 mm
- Eyelet or M4 wire fastening instead of wire clip
- Modified cable and/or connector orientation
- Modified cable outlet direction
- Sensor protection level IP67

Recommended standard variants (with encoder analog, scalable with limit switch function)

Order no. draw wire encoder	Mounted encoder	Interface	Power supply	Type of connection	Resolution / Protocol	Option
D8.xD1.xxxx.M134.3512	Sendix M5861 (8.M5861.3534.3512)	Analog, 4 ... 20 mA	10 ... 30 V DC	radial M12 connector	12 Bit / 4 ... 20 mA	scalable with limit switch function ²⁾
D8.xD1.xxxx.M144.4512	Sendix M5861 (8.M5861.3544.4512)	Analog, 0 ... 10 V	15 ... 30 V DC	radial M12 connector	12 Bit / 0 ... 10 V	scalable with limit switch function ²⁾
D8.xD1.xxxx.M134.3612	Sendix M5861 (8.M5861.3534.3612)	Analog, 4 ... 20 mA	10 ... 30 V DC	radial M12 connector	12 Bit / 4 ... 20 mA	scalable without limit switch function ²⁾
D8.xD1.xxxx.M144.4612	Sendix M5861 (8.M5861.3544.4612)	Analog, 0 ... 10 V	15 ... 30 V DC	radial M12 connector	12 Bit / 0 ... 10 V	scalable without limit switch function ²⁾

Order code with analog sensor (scaled to measuring range)

D8.3D1 . XXXX . XXX X . 0000
Type **a** **b** **c** **0000**


a *Measuring range*
0800 = 8 000 mm
1000 = 10 000 mm
1500 = 15 000 mm
2000 = 20 000 mm
2500 = 25 000 mm
3000 = 30 000 mm
3500 = 35 000 mm
4000 = 40 000 mm

b *Analog sensor output / power supply*
A11 = 4 ... 20 mA / 12 ... 30 V DC
A22 = 0 ... 10 V / 12 ... 30 V DC
A33 = potentiometer 1 kΩ / max. 30 V DC


c *Type of connection*
1 = axial cable, 2 m [6.56'] PVC
3 = axial M12 connector, 4-pin



Optional on request

- Other measuring ranges
- Cable diameter 1 mm
- Eyelet or M4 wire fastening instead of wire clip
- Modified cable and/or connector orientation
- Modified cable outlet direction
- Sensor protection level IP67
- Improved linearity (0.02 %)
- Increased temperature range -40°C ... +85°C and -20°C ... +120°C

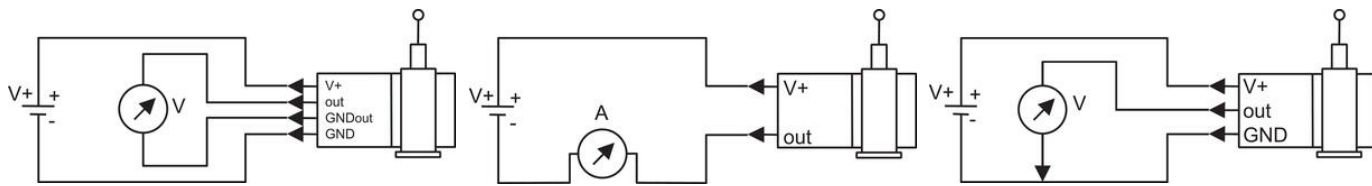

Pin	1	2	3	4
Cable colour	brown	white	blue	black
0 ... 10V	V+	Signal	GND	GND Sig.
4 ... 20 mA	V+	n. c.	Signal	n. c.
1 kOhm	V+	Slider	GND	n. c.

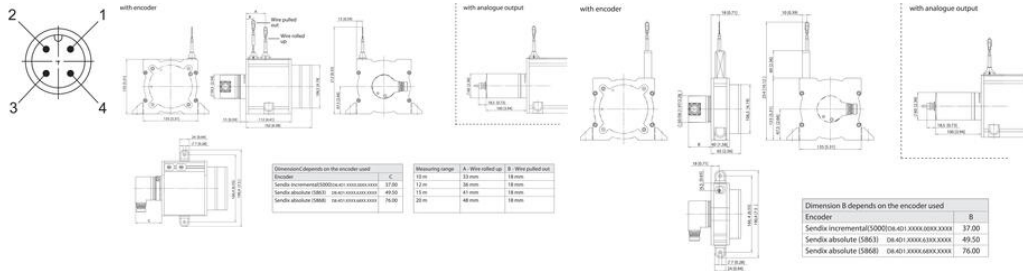

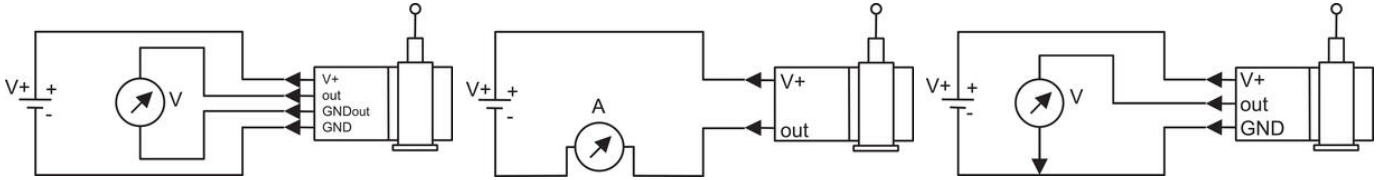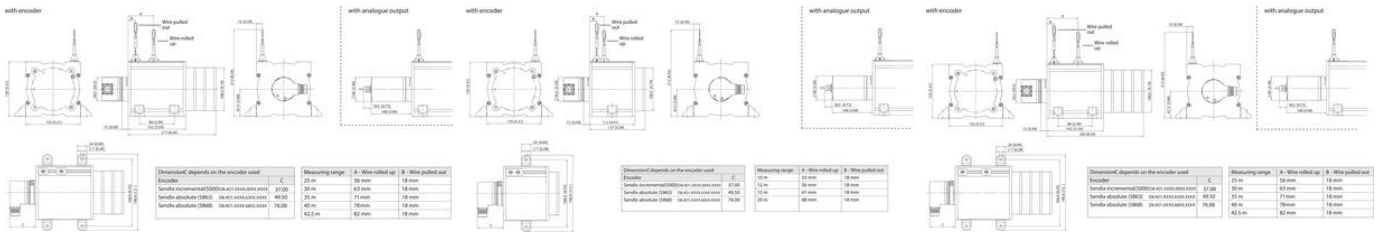

Pin	1	2	3	4
Cable colour	brown	white	blue	black
0...10V	V+	Signal	GND	GND Sig.
4...20 mA	V+	n. c.	Signal	n. c.
1kOhm	V+	Slider	GND	n. c.

