

PRZEPUSTY MEMBRANOWE KES

28633.4

KES 16-1/24 Screw Mount Cable Entry Black

- Średnice kabli od 3.2mm do 20.5mm
- Stopień ochrony IP66
- Materiał: poliamid 6.6 wzmocniony włóknem szklanym
- Certyfikat ECOLAB - agresywne środki czyszczące
- Wolne od halogenu i silikonu



OPIS PRODUKTU

SPECYFIKACJA TECHNICZNA

Certyfikat NEMA	4x
Długość	149,6 mm
Długość otworu pod przepust	112 mm
Klasa palności	V-0
Kod taryfy celnej	39259020
Kolor	Czarny
Kraj pochodzenia	DE
Liczba otworów montażowych	4 szt
Liczba otworów na kable	16 szt
Masa	116,9 g
Materiał	Poliamid 6.6
Materiał uszczelek	TPE
Max. temperatura pracy	90 °C
Min. temperatura pracy	-40 °C
Montaż	Śrubowy

Number of cables x cable diameter	2 x 3.2mm-6.3mm, 1 x 8.0mm-12.5mm, 3 x 12.0mm-16.2mm, 9 x 4.0mm-7.5mm, 1 x 5.5mm-10.5mm
Rozmiar śrub montażowych	M5
Średnica otworów montażowych	5,5 mm
Standard cUL	C22.2 No. 14-18
Standard UL	UL 508A
Stopień ochrony IP	IP66
Szerokość	58 mm
Szerokość otworu pod przepust	36 mm
Type	KES
Wall thickness	N/A
Wielkość opakowania	10 szt
Wolny od halogenu	Tak
Wolny od silikonu	Tak
Wysokość ramki	14,5 mm
Wzmocnienie włóknem szklanym	Tak
Zalecany moment dokręcania	3



You can choose one of three attachment options to fit your requirements

1. Screw-on mount



The KES (without threaded bush) is screwed from the outside onto the housing wall.

2. Screw-on mount with threaded bushes and latching clips



Using the latching clips, the KES-GB latches onto the outside of the housing wall. It is then screwed on from the inside, through the housing wall, using the integrated threaded bushes.

3. Latched (snap-on) mount using latching hooks



The KES-R is latched from outside to the housing wall using the latching clips.

KES 16-1/24


2x Ø1.2 - 6.3mm

4x Ø1.3 - 9.5mm

1x Ø1.5 - 10.5mm

1x Ø1.8 - 12.5mm

1x Ø1.9 - 16.2mm

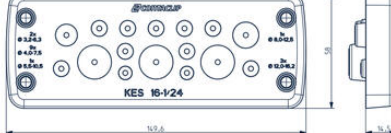

Panel cut-out
for wall thickness
1.5 - 2 mm
(for snap-on attachment)



You can choose one of three attachment options to fit your requirements

1. Screw-on mount



The KES (without threaded bush) is screwed from the outside onto the housing wall.

2. Screw-on mount with threaded bushes and latching clips



Using the latching clips, the KES-GB latches onto the outside of the housing wall. It is then screwed on from the inside, through the housing wall, using the integrated threaded bushes.

3. Latched (snap-on) mount using latching hooks



The KES-R is latched from outside to the housing wall using the latching clips.

