

PRZETWORNIK PROGRAMOWALNY, 1 WEJŚCIE, 2 SEPAROWANE WYJŚCIA

750321

Przetwornik programowalny, 1 wejście, 2 separowane wyjścia


- 6,2mm szerokości
- Automatyczna kalibracja
- Szeroki zakres wejść i wyjść
- 4-krotna izolacja galwaniczna 2,5 kV
- Zasilanie 24 V DC




OPIS PRODUKTU

SPECYFIKACJA TECHNICZNA


Dopuszczenia	CE, DNV, GL, RoHS
Impedancja mocy	400 Ω @ 0–20 mA, 4–20 mA
Impedancja napięcia	>2 k Ω @ 0–10 V
Impedancja napięcia wejścia	500 k Ω
Impedancja prądu mA	0,1 Ω
Izolacja galwaniczna	4-tię
Izolacja galwaniczna wejście/wyjście	2500 V
Maksymalny przekrój kabla	1,5 mm ²
Napięcie zasilania	24 V DC
Napięcie zasilania DC maks.	30 V
Napięcie zasilania DC min.	16,8 V
Pobór mocy	13 mA
Przekrój min.	0,14 mm ²
Wskazywanie statusu	Vioreā LED
Wybór wejścia przez DIP Switch	0-10V,0-20mA,4-20mA
Wybór wyjścia przez DIP Switch	0-10V,0-20mA,4-20mA

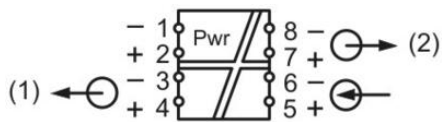

	S1 ● → Switch On							
Range	1	2	3	4	5	6	7	8
0-10V	●		●		●			
0-20mA	●		●		●			
4-20mA	●		●		●			
Input			Output 1		Output 2			
Filter Off								
Filter On						●		
Output Limitation Off								
Output Limitation On								●

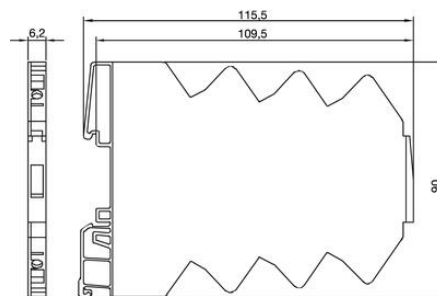

See instruction leaflet for details

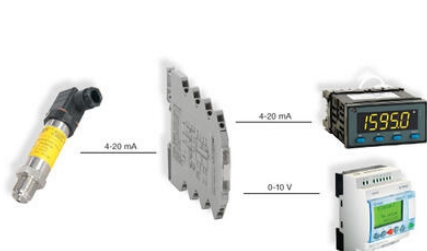

	S1 ● → Switch On							
Range	1	2	3	4	5	6	7	8
0-10V	●		●		●			
0-20mA	●		●		●			
4-20mA	●		●		●			
Input			Output 1		Output 2			
Filter Off								
Filter On						●		
Output Limitation Off								
Output Limitation On								●

See instruction leaflet for details

