OEM Automatic Sp. z o.o.
ul. Działkowa 121 A, 02-234 Warszawa
+48 22 863 27 22 | info@pl.oem.se | www.oemautomatic.pl

DATALOGIC - QUICK LINK 300

QL300
QL300 STANDARD CONNECTION MODULE

- Kompaktowe wymiary
- Pasywny moduł nadrzędny
- Szybkie i łatwe połączenie z siecią ID-NET™




OPIS PRODUKTU

Quick Link to kompletna seria modułów do szybkiego okablowania sieci ID-NET™ przy użyciu standardowych przewodów. QL300 to pasywny moduł nadrzędny przeznaczony do współpracy z modułami podrzędnymi QL100/150/200; może również pracować jako niezależne urządzenie. QL300 ma osobne porty zasilania, zewnętrznego sygnału wyzwalania, cyfrowych wejść/wyjść oraz komunikacji.


SPECYFIKACJA TECHNICZNA

Masa	312 g
Max. temperatura pracy	50 °C
Max. temperatura składowania	70 °C
Min. temperatura pracy	0 °C
Min. temperatura składowania	-20 °C
Napięcie zasilania DC max.	30 V DC
Napięcie zasilania DC min.	10 V DC
Pobór mocy (max)	4 A
Stopień ochrony IP	IP65

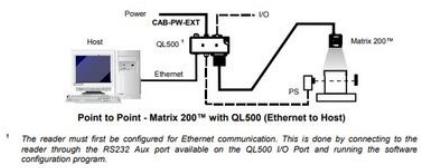

Point to Point - Matrix 200™ with QL500 (Ethernet to Host)


[1] *The reader must first be configured for Ethernet communication. This is done by connecting to the reader through the RS232 Aux port available on the QL500 I/O Port and running the software configuration program.*

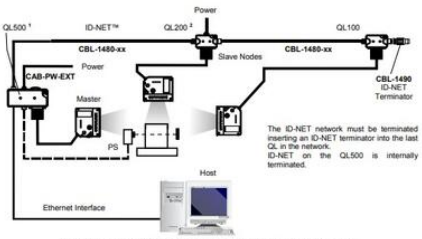


ID-NET™ Synchronized Network - DS4800 Master with QL500 + DS4800 Slaves with QL200 and QL100

[1] *The reader must first be configured for Ethernet communication. This is done by connecting to the reader through the RS232 Aux port available on the QL500 I/O Port and running the software configuration program.*


[2] *The above diagram is an example showing layout connections and is not intended to represent power limits, which instead, depend on each specific application. See "Voltage Drop and Max Distributed Current Calculations".*

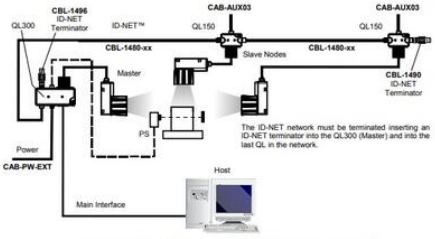



ID-NET™ Synchronized Network - Matrix 400™ Master with QL300 + Matrix 400™ Slaves with QL150

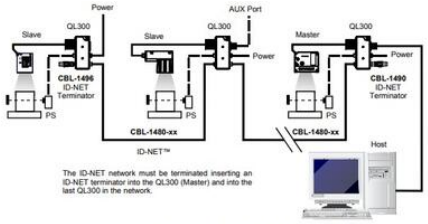



ID-NET™ Multidata Network - DS4800 Master with QL300 + Mixed Reader Slaves with QL300s


I/O Port 15P HD D-Sub Female			
Pin	**Function**	**Pin**	**Function**
1	O1+	9	I2A
2	TXA	10	O2-
3	RXA	11	I2B
4	RXM *	12	TXM *
5	CTSM *	13	GND
6	O1-	14	SGND
7	Vdc	15	RTSM *
8	O2+		


Reader 25P D-Sub Female			
Pin	**Function**	**Pin**	**Function**
1, shell, both bushings	Reader Chassis		
2	TXM	14	nc
3	RXM	15	nc
4	RTSM *	16	nc
5	CTSM *	17	nc
6	I2A	18	I1A
7	GND	19	GND
8	O1+	20	RXA
9	nc	21	TXA
10	I2B	22	O1-
11	O2+	23	ID+
12	O2-	24	ID-
13	Vdc	25	GND


QL300 only (ID-NET In) M12 5P Male (A-coded)		
Pin	**Function**	
1	Shield	
2	nc	
3	GND	
4	ID+	
5	ID-	

Trigger M12 4P Female (A-coded)		
Pin	**Function**	
1	+V	
2	nc	
3	-V	
4	I1+	

Power M12 3P Male (B-coded)		
Pin	**Function**	
1	Earth	
2	Vdc	
3	GND	


ID-NET Out M12 5P Female (A-coded)		
Pin	**Function**	
1	Shield	
2	Vdc	
3	GND	
4	ID+	
5	ID-	





Point to Point - Matrix 200™ with QL500 (Ethernet to Host)


[1] *The reader must first be configured for Ethernet communication. This is done by connecting to the reader through the RS232 Aux port available on the QL500 I/O Port and running the software configuration program.*

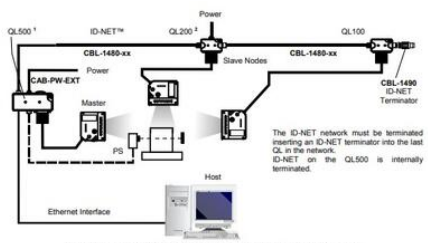


ID-NET™ Synchronized Network - DS4800 Master with QL500 + DS4800 Slaves with QL200 and QL100

[1] *The reader must first be configured for Ethernet communication. This is done by connecting to the reader through the RS232 Aux port available on the QL500 I/O Port and running the software configuration program.*

[2] *The above diagram is an example showing layout connections and is not intended to represent power limits, which instead, depend on each specific application. See "Voltage Drop and Max Distributed Current Calculations".*

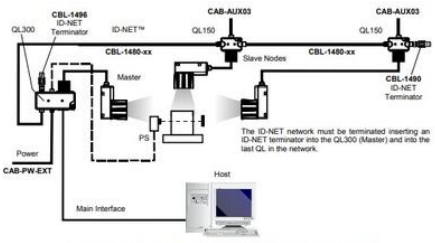


ID-NET™ Synchronized Network - Matrix 400™ Master with QL300 + Matrix 400™ Slaves with QL150

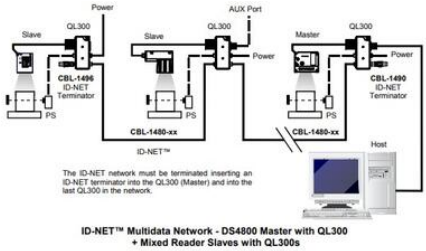


ID-NET™ Multidata Network - DS4800 Master with QL300 + Mixed Reader Slaves with QL300s

I/O Port
15P HD D-Sub Female



Pin	Function	Pin	Function
1	O1+	9	I2A
2	TXA	10	O2-
3	RXA	11	I2B
4	RXM *	12	TXM *
5	CTSM *	13	GND
6	O1-	14	SGND
7	Vdc	15	RTSM *
8	O2+		


Reader
25P D-Sub Female



Pin	Function	Pin	Function
1, shell, both bushings	Reader Chassis		
2	TXM	14	nc
3	RXM	15	nc
4	RTSM *	16	nc
5	CTSM *	17	nc
6	I2A	18	I1A
7	GND	19	GND
8	O1+	20	RXA
9	nc	21	TXA
10	I2B	22	O1-
11	O2+	23	ID+
12	O2-	24	ID-
13	Vdc	25	GND


QL300 only (ID-NET In)
M12 5P Male (A-coded)

Pin	Function
1	Shield
2	nc
3	GND
4	ID+
5	ID-




Trigger
M12 4P Female (A-coded)

Pin	Function
1	+V
2	nc
3	-V
4	I1+




Power
M12 3P Male (B-coded)


Pin	Function
1	Earth
2	Vdc
3	GND



ID-NET Out
M12 5P Female (A-coded)

Pin	Function
1	Shield
2	Vdc
3	GND
4	ID+
5	ID-





QL300