

PRZEPUSTY MEMBRANOWE KES

28653.6

KES-R 16/24 Przepust szary

- Średnice kabli od 3.2mm do 20.5mm
- Stopień ochrony IP66
- Materiał: poliamid 6.6 wzmocniony włóknem szklanym
- Certyfikat ECOLAB - agresywne środki czyszczące
- Wolne od halogenu i silikonu



OPIS PRODUKTU

SPECYFIKACJA TECHNICZNA

Certyfikat NEMA	4x
Długość	149,6 mm
Długość otworu pod przepust	112 mm
Klasa palności	V-0
Kod taryfy celnej	39259020
Kolor	Szary
Kraj pochodzenia	DE
Liczba otworów na kable	16 szt
Masa	120,6 g
Materiał	Poliamid 6.6
Materiał uszczelek	TPE
Max. temperatura pracy	90 °C
Min. temperatura pracy	-40 °C
Montaż	Zatrzaskiwane
Number of cables x cable diameter	2 x 3.2mm-6.3mm, 1 x 8.0mm-12.5mm, 3 x 12.0mm-16.2mm, 9 x 4.0mm-7.5mm, 1 x 5.5mm-10.5mm

Standard cUL	C22.2 No. 14-18
Standard UL	UL 508A
Stopień ochrony IP	IP66
Szerokość	58 mm
Szerokość otworu pod przepust	36 mm
Type	KES-R
Wall thickness	1.5mm-2.0mm
Wielkość opakowania	10 szt
Wolny od halogenu	Tak
Wolny od silikonu	Tak
Wysokość ramki	14,5 mm
Wzmocnienie włóknem szklanym	Tak



You can choose one of three attachment options to fit your requirements

1. Screw-on mount



The KES (without threaded bush) is screwed from the outside onto the housing wall.

2. Screw-on mount with threaded bushes and latching clips



Using the latching clips, the KES-GB latches onto the outside of the housing wall. It is then screwed on from the inside, through the housing wall, using the integrated threaded bushes.

3. Latched (snap-on) mount using latching hooks



The KES-R is latched from outside to the housing wall using the latching clips.

KES 16-1/24


2x Ø1.2 - 6.3mm

4x Ø4.0 - 7.5mm

4x Ø5.5 - 10.5mm

4x Ø6.0 - 12.5mm

3x Ø12 - 16.2mm

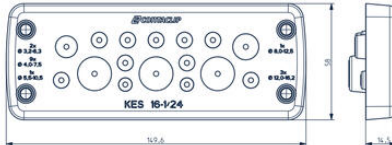

Panel cut-out
for wall thickness
1.5 - 2 mm
(for snap-on attachment)



You can choose one of three attachment options to fit your requirements

1. Screw-on mount



The KES (without threaded bush) is screwed from the outside onto the housing wall.

2. Screw-on mount with threaded bushes and latching clips



Using the latching clips, the KES-GB latches onto the outside of the housing wall. It is then screwed on from the inside, through the housing wall, using the integrated threaded bushes.

3. Latched (snap-on) mount using latching hooks



The KES-R is latched from outside to the housing wall using the latching clips.