

CROUZET - MIKROPRZELĄCZNIK 83 106 NC

83106022

Mikroprzełącznik 83106 1NO+1NC styki W3


- Aktywatory rolkowe i zderzakowe
- Bistabilny lub monostabilny




OPIS PRODUKTU

SPECYFIKACJA TECHNICZNA


Histereza maks.	0,7 mm
Krótkotrwały prąd cieplny przy 250 V AC	17,5 A
Maks. dopuszczalne przebiegnięcie	20 N
Max. temperatura pracy	85 °C
Min. przejście poza punkt pracy	0,7 mm
Min. temperatura pracy	-40 °C
Minimalna siła zwalniająca	1 N
Podłączenie	W3
Pozycja początkowa	12,75 mm
Prąd nominalny przy 250 V AC	5 A
Przerwa stykowa	0,4 x 2 mm
Punkt pracy	11,45±0,2-0,25
Siła załączająca Max.	4 N
Stopień ochrony IP	IP40
Trwałość mechaniczna	10 ⁴ 7 cykli
Typ styków	1 NO, 1 NC

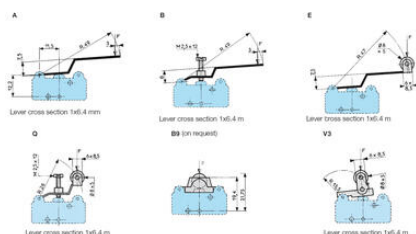

W3 for 6.35 mm clips

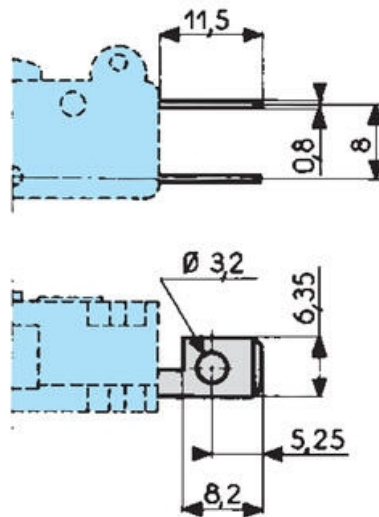


83 106

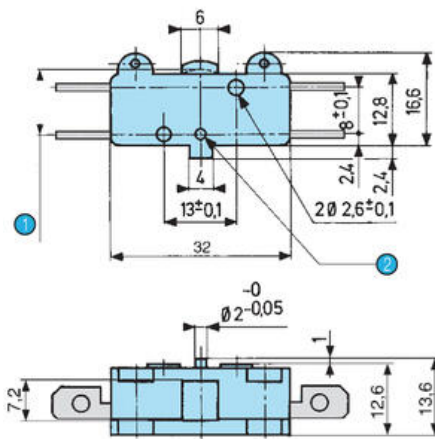


- 1 OL = 10.65
- 2 Ø 2^{+0.01 +0.65} depth 1.2


83 106 7




83 106 4

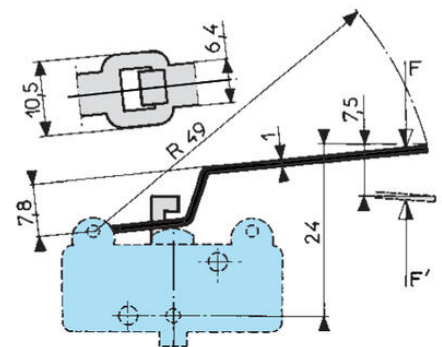


W1 screw

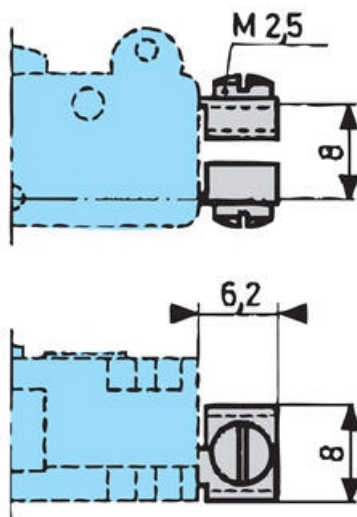



W2 solder

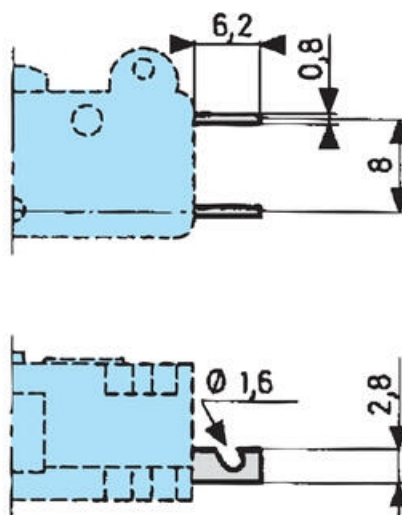


O2 2-pole side mounting plate

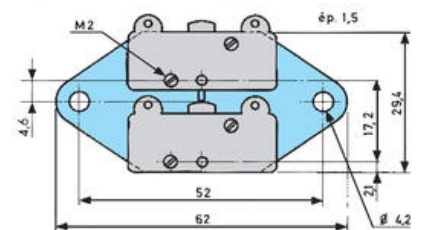


K2 (on request)
2-pole vertical mounting plate




Y (on request)
side plate





H
Horizontal single pole mounting plate




Without indication, the thickness of the plate is 1.5 mm

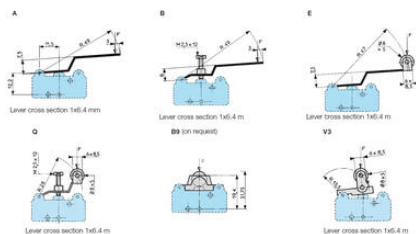



W3 for 6.35 mm clips

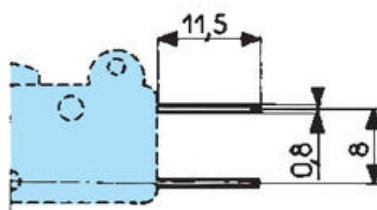

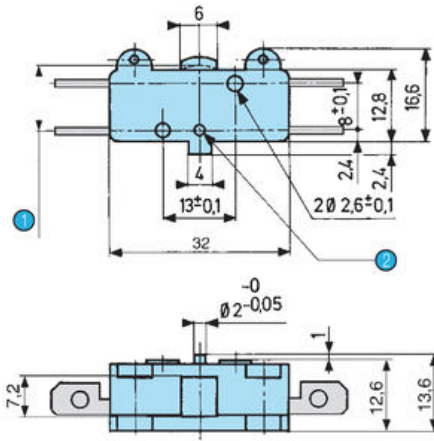


1 OL = 10.65


2 $\varnothing 2^{+0.01 +0.65}$ depth 1.2

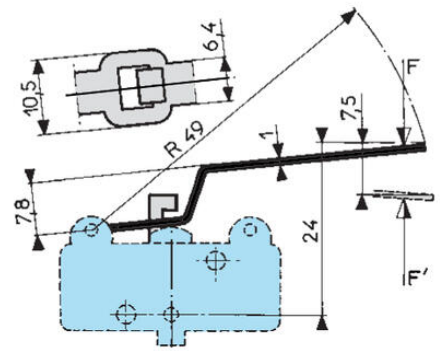


W1 screw

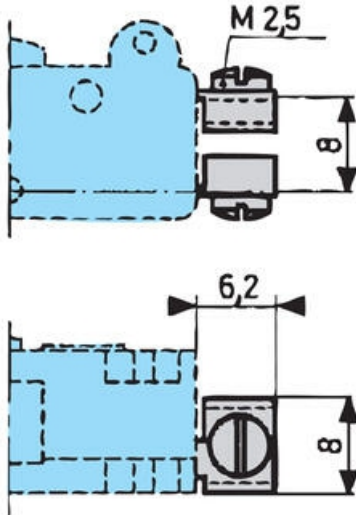


W2 solder

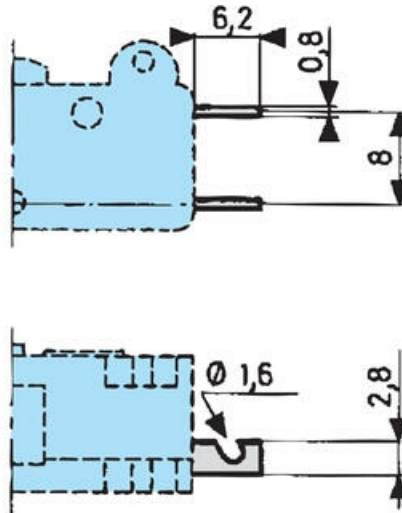


O2 2-pole side mounting plate

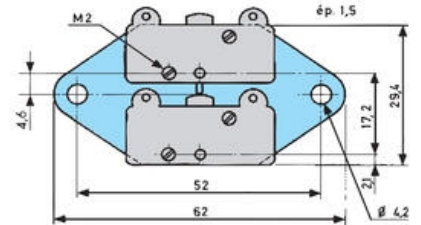


K2 (on request) 2-pole vertical mounting plate

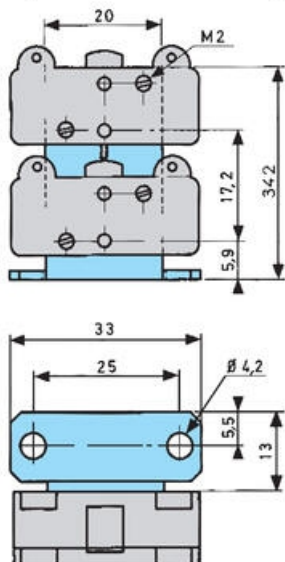

Y (on request) side plate



H Horizontal single pole mounting plate



Without indication, the thickness of the plate is 1.5 mm

