

ZASILACZ 3-FAZOWY, 400VAC LUB 480VAC, 960W, 24VDC, 40A, SERIA DIMENSION X

XT40.241

Zasilacz 400VAC +/-15%, 960W, 24VDC, 40A

- Prąd wyjściowy: 40A
- Sprawność: 95,5%
- Rezerwa mocy: 25%
- Szerokość: 96 mm








OPIS PRODUKTU

SPECYFIKACJA TECHNICZNA

Aktywny filtr (PFC)	Tak
Czas podtrzymania przy 400 VAC, pełne obciążenie, typowo	2 ms
Częstotliwość zasilania	50-60 ±6 %
Dopuszczenia	CB, CE, CSA, UL
Głębokość	159 mm
Liczba faz	3
Maksymalne napięcie wyjściowe	24 V DC
Masa	1,4 kg
Materiał obudowy	Aluminium
Minimalne napięcie wyjściowe	24 V DC
Moc	960 W
MTBF (IEC 61709) 400 V AC, max. obciążenie +40 °C	529000 h
Napięcie wyjściowe	24 V DC
Napięcie zasilania AC	400 V
Napięcie zasilania AC (max)	440 V AC









Napięcie zasilania AC (min)	360 V AC
Prąd rozruchowy przy 400VAC (typowo)	4 A
Prąd wyjściowy	40 A
Redukcja mocy od +60 ° C do +70 ° C	24 W/°C
Seria	Dimension X
Sprawność przy 400 VAC, pełne obciążenie, typowo	95,5 %
Stopień ochrony IP	IP20
Szerokość	96 mm
Temperatura maksymalna bez redukcji mocy	60 °C
Temperatura minimalna bez redukcji mocy	-25 °C
Tętnienia max.	200 mV pp
Type Power Supply	AC-DC
Typowy współczynnik mocy przy 400 VAC, przy pełnym obciążeniu	0,93
Wysokość	124 mm
Zużycie mocy przy 400 VAC	1,65 A
Żywotność przy 400VAC, pełnym obciążeniu i temp. +40° C	51000 h

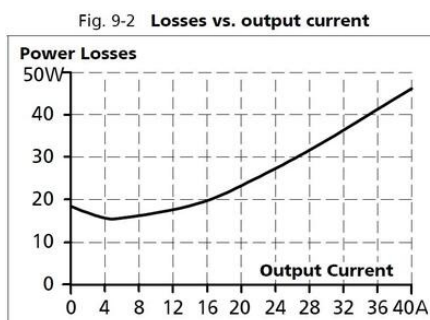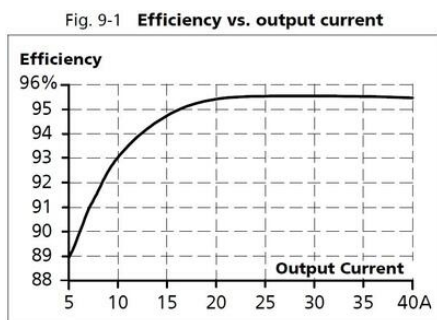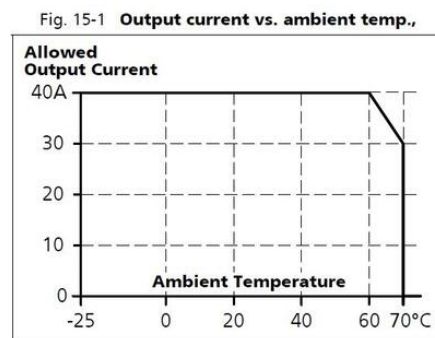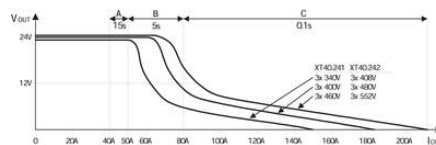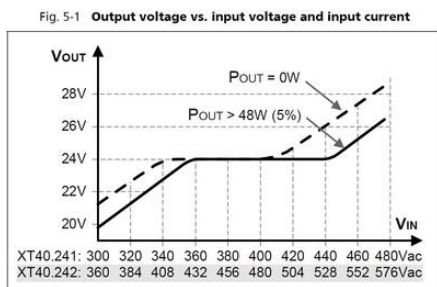

25. COMPARISON BETWEEN THE XT40, A TRANSFORMER AND A TRADITIONAL SWITCHED-MODE POWER SUPPLY

	XT40 Semi-regulated power supply	Traditional switched-mode power supply	Transformer power supply
Input voltage range	+	++	-
Inrush current surge	++	+	-
Hold-up time	-	+	-
Phase-loss operation	-	+	-
Efficiency	+++	++	-
Output voltage regulation	+	++	-
Ripple & noise voltage	-	++	-
Error diagnostics	++	++	-
Harmonic distortion (THD)	+	+	-
EMC	++	++	+
Ease of installation	++	++	-
Size	+++	+	-
Weight	+++	+	-

+++...very, very good ++...very good +...good -...poor

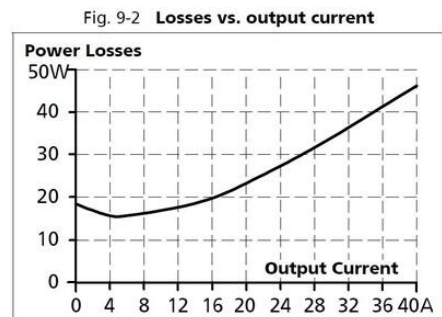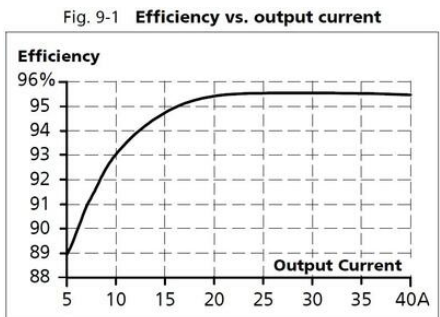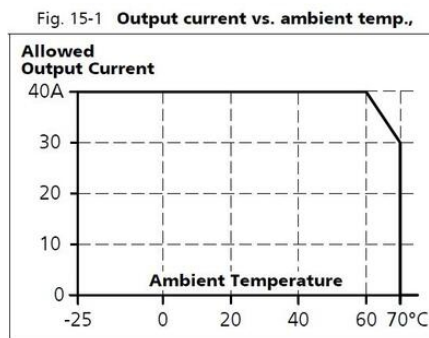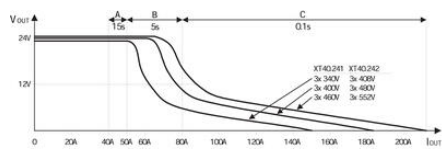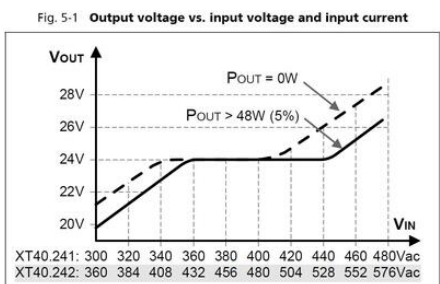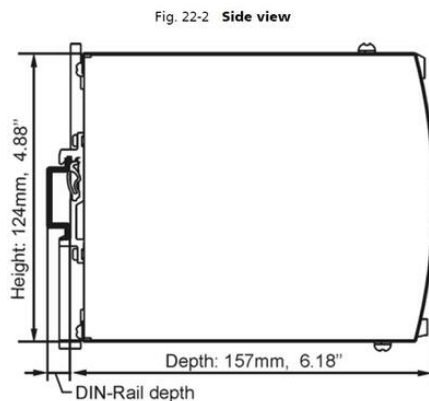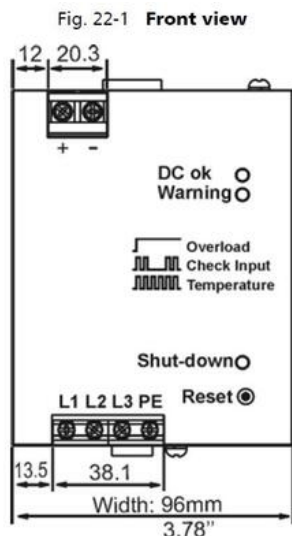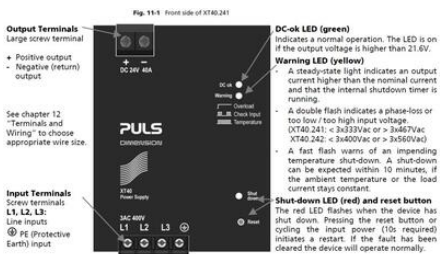

25. COMPARISON BETWEEN THE XT40, A TRANSFORMER AND A TRADITIONAL SWITCHED-MODE POWER SUPPLY

	XT40 Semi-regulated power supply	Traditional switched-mode power supply	Transformer power supply
Input voltage range	+	++	-
Inrush current surge	++	+	-
Hold-up time	-	+	+
Phase-loss operation	-	+	+
Efficiency	+++	++	-
Output voltage regulation	+	++	-
Output adjustment range	-	++	+
Ripple & noise voltage	-	++	-
Error diagnostics	++	++	-
Harmonic distortion (THD)	+	+	-
EMC	++	++	+
Ease of installation	++	++	-
Size	+++	++	-
Weight	+++	+	-

+++...very, very good ++...very good +...good -...poor

