OEM Automatic Sp. z o.o.
ul. Działkowa 121 A, 02-234 Warszawa
+48 22 863 27 22 | info@pl.oem.se | www.oemautomatic.pl

SERIA GR

GR1-410-16-B-S1-2-1-22-2




- 1 - 4-polowe
- 0.2-63 A
- Do 440 V AC
- Do 110 V DC


OPIS PRODUKTU

Firma Mors Smitt ze względu na swoje świetne zorientowanie na potrzeby klienta oferuje szeroką gamę wyłączników miniaturowych o przeróżnych specyfikacjach, aby sprostać najwyższym wymaganiom. Zamówienia należy komponować zgodnie z poniższą formatką. Przedstawione produkty są przykładowe.

Ordering scheme GR - page 1

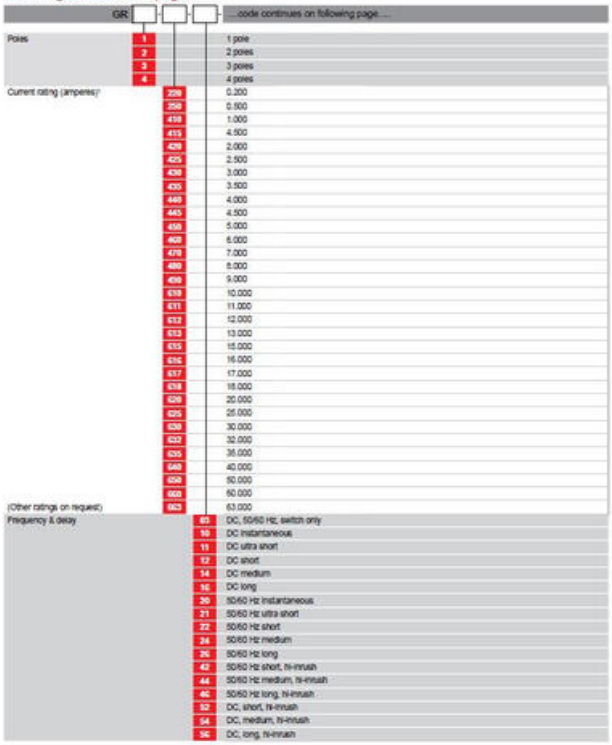

Ordering scheme GR - page 2

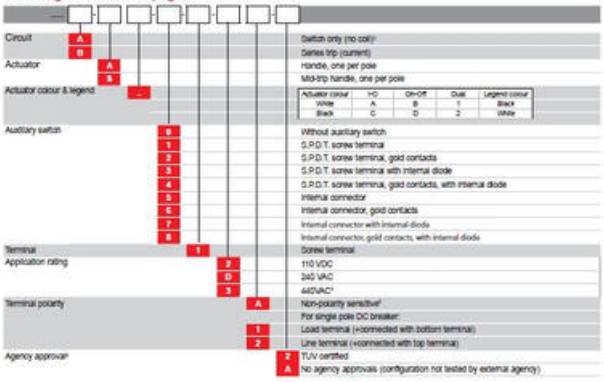

Special configurations, not covered by this ordering scheme, on request.

Example : GR1-610-24-B-A1-2-1-DA-2

Notes:

1. When a breaker is mounted with the handle pointing downwards (e.g. ceiling mounting) the nominal value of the breaker will decrease with 10%. In this situation it is recommended to add 10 % to the rated current
2. Current rating in switch only circuit:
   - for 0.2 to 30 A select current code 630
   - for 30 to 50 A select current code 650
   - for 50 to 63 A select current code 663
3. On multi-pole breakers one auxiliary switch is supplied, mounted in the extreme left pole (front view)
4. 3 pole breaker required
5. Requires AC rating or multi-pole DC break (contacts in series)
6. TUV certified: only for actuator legend 'Dual' and 'I-O'
   Not for actuator legend 'ON-OFF', not for switch only circuit, not for DC more than 2 poles, not for delay curve 50; use code A instead (no agency approvals)

Wszystkie wyłączniki firmy Mors Smitt są projektowane zgodnie z normami:

- IEC 60077-1/2/3/4
- NF F62-001 - 1/2/3
- NF F16-101/102
- EN 45545-2
- EN 50155
- EN 61373
- EN 50124-1
- IEC 60068-2-30
- IEC 60068-2-52
- NF F61-010