

3610/3620 ENKODERY INKREMENTALNE

3610.3342.0100

Enkoder

- Średnica zewnętrzna: Ø 36 mm
- Maks. średnica wałka: Ø 6,35 mm Maks. średnica otworu: Ø 8 mm
- Maks. rozdzielczość: 2500 imp./obr.
- Wyjście: Push-Pull, RS-422
- Obudowa: kompaktowa metalowa



OPIS PRODUKTU

Kompaktowe enkodery inkrementalne typu 3610 /3620 Kubler wykonane w technologii optycznej dostępne są z rozdzielczością do 2500 impulsów na obrót. Wersje z otworem przelotowym dostępne są do średnicy 8mm.


W celu określenia numeru katalogowego proszę o zapoznanie się z poniższymi informacjami.

Order code		8.3610 . XXXXX . XXXX				
Shaft version		Type	a	b	c	d
a Flange						
2 = synchro flange, Ø 36.5 mm [1.44"]						
3 = clamping flange, Ø 36.5 mm [1.44"]						
b Shaft (Ø x L)						
1 = Ø 4 x 10 mm [0.16 x 0.39"]						
2 = Ø 5 x 10 mm [0.20 x 0.39"]						
3 = Ø 6 x 12.5 mm [0.24 x 0.49"], with flat						
5 = Ø 1/4" x 12.5 mm [1/4" x 0.49"], with flat						
c Output circuit / power supply						
2 = push-pull (with inverted signal) / 5 ... 18 V DC						
4 = push-pull (with inverted signal) / 8 ... 30 V DC						
3 = push-pull (without inverted signal) / 8 ... 30 V DC						
6 = RS422 (with inverted signal) / 5 V DC						
5 = RS422 (with inverted signal) / 8 ... 30 V DC						
d Type of connection						
1 = axial cable, 2 m [5.56'] PVC						
A = axial cable, special length PVC *)						
2 = radial cable, 2 m [5.56'] PVC						
B = radial cable, special length PVC *)						
3 = axial M12 connector, 8-pin						
4 = radial M12 connector, 8-pin						
*) Available special lengths (connection types A, B):						
3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21']						
order code expansion .XXXX = length in dm						
ex.: 8.3610.334A.1024.0030 (for cable length 3 m)						
e Pulse rate						
25, 100, 200 , 360, 500 , 512, 600, 1000,						
1024 , 1500, 2000, 2048 , 2500						
(e.g. 500 pulses => 0500)						
Optional on request						
- other pulse rates						

Order code Hollow shaft		8.3620 Type	. XXXX . XXXX a b c d e	
a Flange 1 = with spring element, short 2 = with spring element, long 5 = with stator coupling, ø 46 mm [1.81"]		d Type of connection E = radial cable, 2 m [5.56'] PVC B = radial cable, special length PVC *) 4 = radial M12 connector, 8-pin *) Available special lengths (connection type B): 3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm ex.: 8.3620.224B.1024.0030 (for cable length 3 m)		e Pulse rate 25, 100, 200 , 360, 500 , 512, 600, 1000, 1024 , 1500, 2000, 2048 , 2500 (e.g. 500 pulses => 0500) <i>Optional on request</i> - other pulse rates
b Through hollow shaft 2 = ø 6 mm [0.24"] 4 = ø 8 mm [0.32"] 3 = ø 1/4"				
c Output circuit / power supply 2 = push-pull (with inverted signal) / 5 ... 18 V DC 4 = push-pull (with inverted signal) / 8 ... 30 V DC 3 = push-pull (without inverted signal) / 8 ... 30 V DC 6 = RS422 (with inverted signal) / 5 V DC 5 = RS422 (with inverted signal) / 8 ... 30 V DC				

SPECYFIKACJA TECHNICZNA

Biegunowość	Tak
Częstotliwość	200kHz
Liczba impulsów max	2500
Masa	80 g
Materiał kabla	PVC
Materiał obudowy czujnika	Aluminium
Max. temperatura pracy	85 °C
Min. temperatura pracy	-20 °C
Montaż	Wał
Napięcie zasilania DC max.	30 V DC
Napięcie zasilania DC min.	8 V DC
Podłączenie	Kabel
Speed OF Rotation	12000 rpm
Średnica obudowy	36 mm
Średnica wałka	6 mm
Stopień ochrony IP	IP65
Typ czujnika	Inkrementalny
Wyjście	Push/Pull

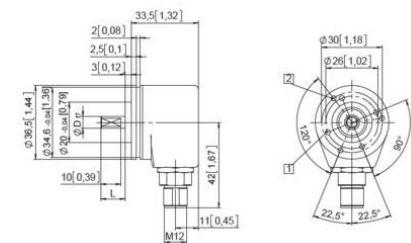

Output circuit	Type of connection	Cable (isolate unused cores individually before initial start-up)									
2, 4, 5, 6 with no signal	1, 2, A, B, E	Signal:	0 V	+V	A	A	B	B	B	B	B
		Core color:	WH	BN	GN	YE	GY	PK	BU	RD	

