

SENDIX F5868/5888, OPTYCZNY, WIELOBROTOWY, CANOPEN, Ø58 MM

Enkodery wielobrotowe absolutne optyczne

SERIE F5868 CANOPEN

- Średnica zewnętrzna: Ø 58 mm
- Maks. średnica wałka: Ø 10 mm. Maks. średnica otworu: Ø 15 mm
- Maks. rozdzielczość: 16 bitów ST + 16 bitów MT
- CANopen
- Temperatura pracy: -40° C do +85° C



OPIS PRODUKTU

Sendix F5868 / F5888 is a series of multivalved optical axes and hole axes with CANopen interface and resolution of up to 32 bits (16 bit multi-color + 16-bit one-turn).

The sensor also has high enclosure, shock resistance and a wide temperature range. The F5868 / F5888 is therefore very suitable for applications where extreme environments or temperatures may occur, such as mobile applications.


W celu określenia numeru katalogowego proszę o zapoznanie się z poniższymi informacjami.

| Order code | 8.F5868 | .XX2X | .212X |
|-----------------------------------|--|---|---|
| Shaft version | Type | a b c d | e f |
| a Flange | 1 = clamping flange, IP65 ø 58 mm [2.28"] 3 = clamping flange, IP67 ø 58 mm [2.28"] 2 = synchro flange, IP65 ø 58 mm [2.28"] 4 = synchro flange, IP67 ø 58 mm [2.28"] | c Interface / power supply 2 = CANopen DS301 V4.02 / 10 ... 30 V DC | e Fieldbus profile 21 = CANopen |
| b Shaft (ø x L), with flat | 1 = 6 x 10 mm [0.24 x 0.39"]¹⁾ 2 = 10 x 20 mm [0.39 x 0.79"]²⁾ 3 = 1/4" x 7/8" 4 = 3/8" x 7/8" | d Type of connection A = radial cable, 2 m [6.56"] PVC B = radial cable, special length PVC *) E = 1 x radial M12 connector, 5-pin F = 2 x radial M12 connector, 5-pin *) Available special lengths (connection type B): 3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21"] order code expansion .XXXX = length in dm ex.: 8.F5868.122B.2123.0030 (for cable length 3 m) | f Options (service) 2 = no option 3 = SET button <i>Optional on request</i> - Ex 2/22 ³⁾ - surface protection salt spray tested |

| Order code | 8.F5888 | .XX2X | .212X |
|-------------------------------|---|---|---|
| Hollow shaft | Type | a b c d | e f |
| a Flange | 1 = with spring element, long, IP65 2 = with spring element, long, IP67 3 = with stator coupling, IP65 ø 65 mm [2.56"] 4 = with stator coupling, IP67 ø 65 mm [2.56"] 5 = with stator coupling, IP65 ø 63 mm [2.48"] 6 = with stator coupling, IP67 ø 63 mm [2.48"] | c Interface / power supply 2 = CANopen DS301 V4.02 / 10 ... 30 V DC | e Fieldbus profile 21 = CANopen |
| b Through hollow shaft | 3 = ø 10 mm [0.39"] 4 = ø 12 mm [0.47"] 5 = ø 14 mm [0.55"] 6 = ø 15 mm [0.59"] <i>Blind hollow shaft</i> (insertion depth max. 30 mm [1.18"]) B = ø 12 mm ¹⁾ | d Type of connection L = tangential cable, 2 m [6.56"] PVC M = tangential cable, special length PVC *) E = 1 x radial M12 connector, 5-pin F = 2 x radial M12 connector, 5-pin ²⁾ *) Available special lengths (connection type M): 3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21"] order code expansion .XXXX = length in dm ex.: 8.F5888.542M.2123.0030 (for cable length 3 m) | f Options (service) 2 = no option 3 = SET button <i>Optional on request</i> - Ex 2/22 ³⁾ (not for type of connection L, M) - surface protection salt spray tested |

SPECYFIKACJA TECHNICZNA

| | |
|----------------------------|------------------------------|
| Max. temperatura pracy | 85 °C |
| Min. temperatura pracy | -40 °C |
| Montaż | Wał |
| Napięcie zasilania DC max. | 30 V DC |
| Napięcie zasilania DC min. | 10 V DC |
| Podłączenie | Kabel, M12 |
| Rozdzielczość MT | 16 bit |
| Rozdzielczość ST | Max: 16 bit, default: 13 bit |
| Średnica obudowy | 58 mm |
| Średnica wału max | 10 mm |
| Średnica wału min | 6 mm |
| Stopień ochrony IP | IP65, IP67 |
| Typ czujnika | Absolutny |
| Wersja | Wielobrotowy |
| Wyjście | CANopen |

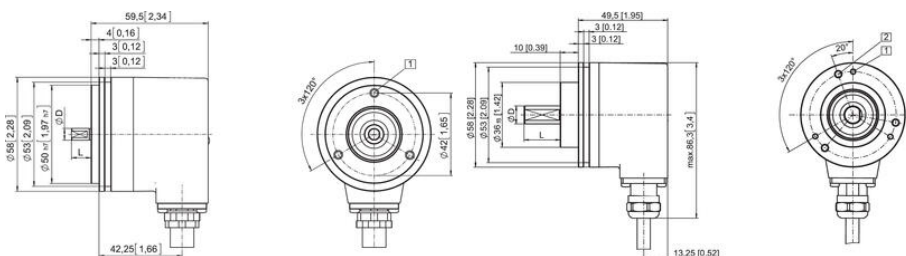

| Interface | Type of connector | Function | Cable (Bus terminal cover with terminal box) | | | | | | |
|-----------|-------------------|----------|--|-----|----|-------|-------|---------|-----------|
| 2 | A, B, L, M | Bus IN | Signal: | 0 V | +V | CAN_L | CAN_H | CAN_GND | |
| | | | power supply: | | | | | | |
| | | | Abbreviation: | 0 V | +V | CL | CH | CG | |
| | | | Cable colour: | WH | BN | YE | GN | GY | |
| 2 | F | Bus IN | Signal: | 0 V | +V | CAN_L | CAN_H | CAN_GND | 1 2 3 4 5 |
| | | | power supply: | | | | | | |
| | | | Abbreviation: | 0 V | +V | CL | CH | CG | |
| | | | Pin: | 3 | 2 | 5 | 4 | 1 | |
| | | Bus OUT | Signal: | 0 V | +V | CAN_L | CAN_H | CAN_GND | 1 2 3 4 |
| | | | power supply: | | | | | | |
| | | | Abbreviation: | 0 V | +V | CL | CH | CG | |
| | | | Pin: | 3 | 2 | 5 | 4 | 1 | |
| 2 | E | Bus IN | Signal: | 0 V | +V | CAN_L | CAN_H | CAN_GND | 1 2 3 4 5 |
| | | | power supply: | | | | | | |
| | | | Abbreviation: | 0 V | +V | CL | CH | CG | |
| | | | Pin: | 3 | 2 | 5 | 4 | 1 | |

| Interface | Type of connector | Function | Cable (Bus terminal cover with terminal box) | | | | | | |
|-----------|-------------------|----------|--|-----|----|-------|-------|---------|-----------|
| 2 | A, B, L, M | Bus IN | Signal: | 0 V | +V | CAN_L | CAN_H | CAN_GND | |
| | | | power supply: | | | | | | |
| | | | Abbreviation: | 0 V | +V | CL | CH | CG | |
| | | | Cable colour: | WH | BN | YE | GN | GY | |
| 2 | F | Bus IN | Signal: | 0 V | +V | CAN_L | CAN_H | CAN_GND | 1 2 3 4 5 |
| | | | power supply: | | | | | | |
| | | | Abbreviation: | 0 V | +V | CL | CH | CG | |
| | | | Pin: | 3 | 2 | 5 | 4 | 1 | |
| | | Bus OUT | Signal: | 0 V | +V | CAN_L | CAN_H | CAN_GND | 1 2 3 4 |
| | | | power supply: | | | | | | |
| | | | Abbreviation: | 0 V | +V | CL | CH | CG | |
| | | | Pin: | 3 | 2 | 5 | 4 | 1 | |
| 2 | E | Bus IN | Signal: | 0 V | +V | CAN_L | CAN_H | CAN_GND | 1 2 3 4 5 |
| | | | power supply: | | | | | | |
| | | | Abbreviation: | 0 V | +V | CL | CH | CG | |
| | | | Pin: | 3 | 2 | 5 | 4 | 1 | |