



SYGNALIZATORY ŚWIETLNO-DŹWIĘKOWE CS1

C111621005

CS1 Syrena wielotonowa, czerwona, z lampą mig.,
pomar., 24V

- Technologia LED zapewniająca długą żywotność
- 32 tony do wyboru
- Natężenie dźwięku 86-106 dB
- IP65




OPIS PRODUKTU

SPECYFIKACJA TECHNICZNA



Częstotliwość migania	1 Hz
Częstotliwość tonu maks.	2900 Hz
Częstotliwość tonu min.	440 Hz
Kolor obudowy	Czerwony
Kolor soczewki	Pomarańczowy
Liczba tonów	32 szt
Masa	258 g
Max. temperatura pracy	70 °C
Min. temperatura pracy	-20 °C
Montaż	Poziomy, Pionowy
Napięcie zasilania	24 V
Napięcie zasilania AC/DC maks.	35 V
Napięcie zasilania AC/DC min.	18 V
Natężenie dźwięku maks.	109 dB
Natężenie dźwięku min.	88 dB
Prąd znamionowy maks.	0,041 A

Prąd znamionowy min.	0,014 A
Sterowanie dźwiękiem	Tak
Stopień ochrony IP	IP65
Typ światła	Pomarańczowy LED
Źródło światła	LED

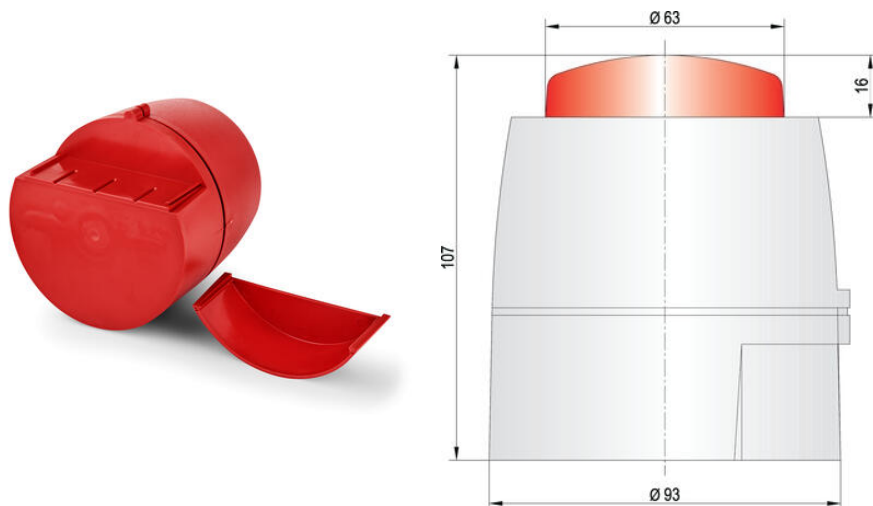

Tontabelle / Tone table

Nr.	Sound	Tone frequency	DP-switch	2nd stage alarm (Hz)
1	LF Siren	800-1000Hz @ 0.5 sec	111111	800 cont
2	Alarm tone with 1st siren	800/600Hz @ 2Hz	111110	800 cont
3	Alarm tone with 2nd siren	800/1000Hz @ 0.5 sec	111100	800 cont
4	Alarm tone with 3rd siren	800/600Hz @ 2Hz	111100	800 cont
5	LF Back up alarm	800/400Hz @ 0.5 sec	110111	800 cont
6	LF Back up alarm	800Hz @ 1.0 sec cont	110110	800 cont
7	LF Back up alarm with 1st siren	800Hz @ 1.0 sec cont	110001	800 cont
8	LF Continuous tone 800Hz	800Hz cont	110000	Same tone
9	LF Continuous tone 1100Hz	800/900Hz @ 1Hz	101111	800 cont
10	Australian slow whoop	Intermittent 970Hz 0.625ms on/0.625ms off	101110	3.75 sec on / 0.75 sec off / 800-1000
11	Dutch sweep tone	970Hz cont	101101	3.5 sec on / 0.5 sec off
12	Swedish alarm tone	800/600Hz @ 2Hz	101000	800 cont
13	Swedish tone 2Hz	800/700Hz @ 2Hz	100011	800 cont
14	Alarm tone with 1st siren	800/600Hz @ 2Hz	100010	800 cont
15	ContIF alarm	800/600Hz @ 0.5 sec	100001	800 cont
16	US Temporal Pattern 1P	800Hz for 1.5 sec on 0.5 sec off	100000	800 cont
17	Intermittent tone 800Hz	Intermittent tone 800Hz @ 0.5 sec on/0.5 sec off	011111	800 cont
18	ISO 8001 LF 800/600 Hz 1 Hz	Intermittent 970Hz 500ms on/500ms off	011110	Same tone
19	Alarm tone with 1st siren	800Hz @ 1.0 sec cont	011101	800 cont
20	ISO 8001 LF	Intermittent 970Hz 500 ms on 500 ms off	011100	Same tone
21	Continuous tone	800Hz continuous	010111	Same tone
22	LF Siren	800/700Hz sweep @ 110Hz	010110	800 cont
23	LF Continuous	800Hz	010001	800 cont
24	Swedish tone 2Hz	800/700Hz @ 2Hz	010000	800 cont
25	German LF tone	Swedish 1200-500Hz @ 1Hz	000111	800 cont
26	Swedish tone 2Hz	Intermittent 600Hz 350 ms on / 150 ms off	000110	Same tone
27	French tone 2 Hz	Swedish for 100 ms and 500Hz for 200ms	000100	800 cont
28	Swedish LF alarm	Continuous 600Hz	000100	Same tone
29	US Temporal Pattern 1P	800Hz for 0.5 sec on 0.5 sec off	000011	2900 cont
30	Swedish alarm tone 1P	800/600Hz rising then falling @ 0.5 sec	000010	800 cont
31	LF 1000 Hz 1 Hz	Intermittent tone 800/700Hz @ 1Hz	000001	800 cont
32	Green 2 way ramp 3Hz	800/1000Hz 3 sec rising / 3 sec falling	000000	800 cont

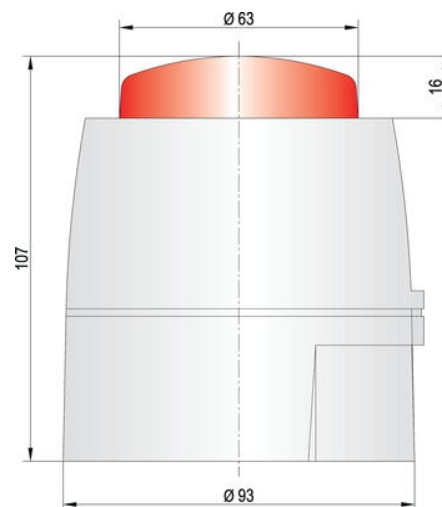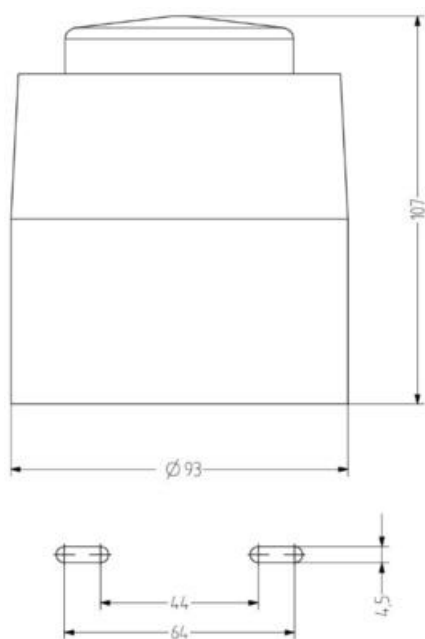

Nr.	Sound	Tone frequency	DR switch	2nd stage alarm (Hz)
1	U.F. Buzzer	800 - 1000Hz at 0.5 sec	11111	800 cont
2	Alarm tone (U.F. stopped)	800/500Hz at 2Hz	11110	800 cont
3	Warning tone (U.F. stopped)	800/1000Hz at 0.5 sec	11101	800 cont
4	Alarm tone (U.F. stopped)	800/500Hz at 2Hz	11100	800 cont
5	U.F. Buzzer at interrupted tone	800Hz at 1.0 sec on/off	11011	800 cont
6	U.F. Buzzer at 100ms	800Hz at 100 msec on/off	11010	800 cont
7	U.F. Buzzer at interrupted tone - fast	800Hz at 1.0 sec on/off	11001	800 cont
8	U.F. Continuous tone (2000)	800Hz cont	11000	800 tone
9	Alarm tone (1 Hz)	800/500Hz at 1Hz	10111	800 cont
10	Australian slow whoop	Intermittent 970Hz 0.425ms on/0.425ms off	10110	500/1000 3.75 sec on 0.425 sec off
11	Dutch sweep tone	970Hz cont	10101	0.5 sec on 0.5 sec off
12	Alarm tone (siren tone)	800/500Hz at 2Hz	10100	800 cont
13	Alarm tone (2 Hz)	800/500Hz at 2Hz	10011	800 cont
14	Alarm tone (U.F. slow pulse)	800/500Hz at 2Hz	10010	800 cont
15	U.F. Buzzer (siren)	800/500Hz at 2Hz	10001	800 cont
16	US Temporal Pattern (F)	800Hz for 0.5 sec on 0.5 sec off x3 then 1.5 sec then repeat	10000	800 cont
17	Interrupted tone (S) standard	Intermittent tone 800Hz at 0.5 sec on/off	01111	800 cont
18	ISO 8001 IF (ISO 8001 Ph 1 & 2)	Intermittent 970Hz 500ms on/500ms off	01110	Siren tone
19	Intermittent tone (medium)	Intermittent 1000Hz at 1.0 sec on/off	01101	800 cont
20	ISO 8001 IF	Intermittent 1000Hz 500ms on/500ms off	01100	Siren tone
21	Continuous tone	1000Hz continuous	01011	Siren tone
22	U.F. Buzzer	800/500Hz on/off at 112Hz	01010	800 cont
23	U.F. Continuous	800Hz	01001	800 cont
24	Alarm tone (2 Hz)	800/500Hz at 2Hz	01000	800 cont
25	German (Ph) tone	Intermittent 800/500Hz at 1Hz	00111	800 cont
26	Swedish Fire alarm	Intermittent 650Hz 150 ms on / 500 ms off	00110	Siren tone
27	French tone at 90	Intermittent for 100 ms and within 400ms	00101	800 cont
28	Swedish at short signal	Continuous 800Hz	00100	Siren tone
29	US Temporal Pattern (F)	800Hz for 0.5 sec on 0.5 sec off off for 1.5 sec then repeat	00011	800 cont
30	Alarm 2 siren alarm (F) cont	800/500Hz siren then falling 8.75 sec	00010	800 cont
31	U.F. (2 Hz) 1 Hz tone	Intermittent tone 800/500Hz 1 Hz on	00001	800 cont
32	Alarm 2 siren alarm (F) cont	800/500Hz 3 sec rising / 3 sec falling	00000	800 cont

