



SYGNALIZATORY ŚWIETLNO-DŹWIĘKOWE CS1

C111222005

CS1 Syrena wielotonowa, biała, z lampą migającą, czerw., 24V

- Technologia LED zapewniająca długą żywotność
- 32 tony do wyboru
- Natężenie dźwięku 86-106 dB
- IP65




OPIS PRODUKTU

SPECYFIKACJA TECHNICZNA



Częstotliwość migania	1 Hz
Częstotliwość tonu maks.	2900 Hz
Częstotliwość tonu min.	440 Hz
Kolor obudowy	Biały
Kolor soczewki	Czerwony
Liczba tonów	32 szt
Masa	258 g
Max. temperatura pracy	70 °C
Min. temperatura pracy	-20 °C
Montaż	Poziomy, Pionowy
Napięcie zasilania	24 V
Napięcie zasilania AC/DC maks.	35 V
Napięcie zasilania AC/DC min.	18 V
Natężenie dźwięku maks.	109 dB
Natężenie dźwięku min.	88 dB
Prąd znamionowy maks.	0,041 A

Prąd znamionowy min.	0,014 A
Sterowanie dźwiękiem	Tak
Stopień ochrony IP	IP65
Typ światła	Pomarańczowy LED
Źródło światła	LED

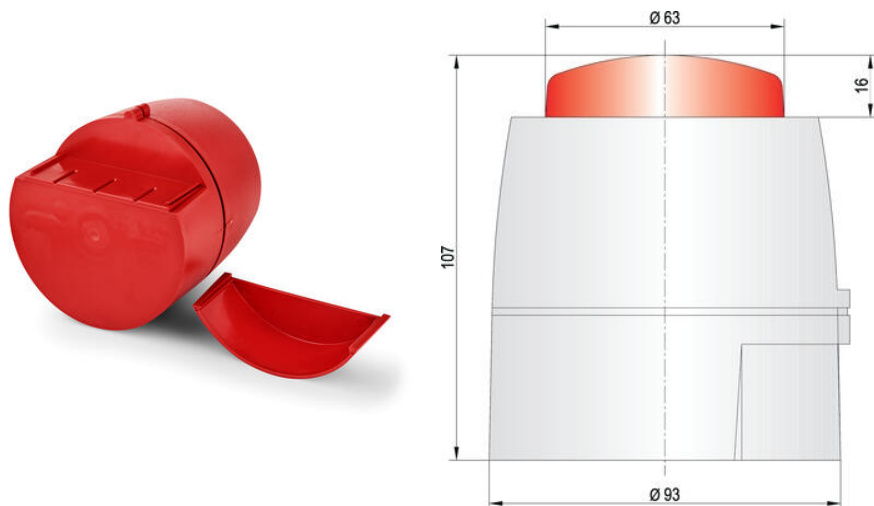

Tontabelle / Tone table

Nr.	Sound	Tone frequency	DP-switch	2nd stage alarm (Hz)
1	LF Siren	800-1000 Hz @ 0.5 sec	111111	800 cont
2	Alarm tone with 1st siren	800/600 Hz @ 2 Hz	111110	800 cont
3	Alarm tone with 2nd siren	800/1000 Hz @ 0.5 sec	111100	800 cont
4	Alarm tone with 3rd siren	800/600 Hz @ 2 Hz	111100	800 cont
5	LF Back-up alarm	800 Hz @ 1 Hz cont	110111	800 cont
6	LF Back-up alarm	800 Hz @ 1 Hz cont	110110	800 cont
7	LF Back-up alarm with 1st siren	800 Hz @ 1 Hz cont	110001	800 cont
8	LF Continuous tone 800 Hz	800 Hz cont	110000	800 cont
9	Swedish tone 119 Hz	800/500 Hz @ 1 Hz	101111	800 cont
10	Australian slow whoop	Intermittent 970 Hz 0.625 ms on/0.625 ms off	101110	800 cont
11	Dutch sweep tone	970 Hz cont	101101	800 cont
12	Swedish alarm tone	800/600 Hz @ 2 Hz	101100	800 cont
13	Swedish tone 2 Hz	800/500 Hz @ 2 Hz	100111	800 cont
14	Alarm tone with 1st siren	800/600 Hz @ 2 Hz	100110	800 cont
15	Continuous tone	800/500 Hz @ 1 Hz	100101	800 cont
16	US Temporal Pattern 1P	800 Hz for 1.5 sec on 0.5 sec off	100100	800 cont
17	Intermittent tone 800 Hz	Intermittent tone 800 Hz @ 0.5 sec on/0.5 sec off	011111	800 cont
18	ISO 8001 LF 800/500 Hz 1 Hz	Intermittent tone 800 Hz @ 0.5 sec on/0.5 sec off	011110	800 cont
19	ISO 8001 LF	Intermittent tone 800 Hz @ 0.5 sec on/0.5 sec off	011101	800 cont
20	Continuous tone	800 Hz continuous	011100	800 cont
21	LF Siren	800/500 Hz @ 1 Hz	010111	800 cont
22	LF Siren	800/500 Hz @ 1 Hz	010110	800 cont
23	LF Siren	800/500 Hz @ 1 Hz	010101	800 cont
24	Swedish tone 2 Hz	800/500 Hz @ 2 Hz	010100	800 cont
25	German LF tone	Swedish 1200/500 Hz @ 1 Hz	001111	800 cont
26	Swedish tone 2 Hz	Intermittent 600 Hz 360 ms on / 150 ms off	001110	800 cont
27	French tone 2 Hz	Intermittent 600 Hz 360 ms on / 150 ms off	001101	800 cont
28	Swedish LF alarm	Intermittent 600 Hz	001100	800 cont
29	US Temporal Pattern 1P	800 Hz for 1.5 sec on 0.5 sec off	000111	2900 cont
30	Swedish tone 2 Hz	Intermittent 600 Hz 360 ms on / 150 ms off	000110	800 cont
31	LF Siren	Intermittent tone 800/500 Hz @ 1 Hz	000101	800 cont
32	Swedish tone 2 Hz	Intermittent tone 800/500 Hz @ 1 Hz	000100	800 cont

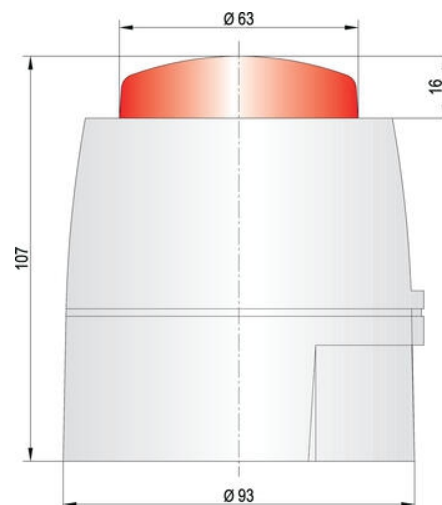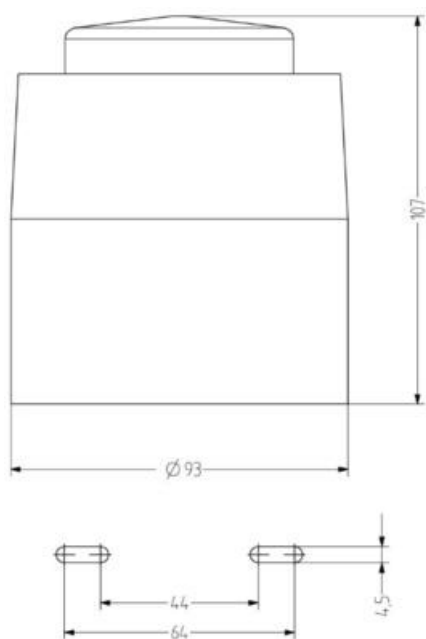

Nr.	Sound	Tone frequency	DR-switch	2nd stage alarm (Hz)
1	LF Buzzer	800 - 1000Hz at 0.5 sec	111111	800 cont
2	Alarm tone with 100 Hz signal	800/900Hz at 2Hz	111110	800 cont
3	Warning tone 100 Hz signal	800/1000Hz at 0.5 sec	111101	800 cont
4	Alarm tone with 100 Hz signal	800/900Hz at 2Hz	111100	800 cont
5	LF Buzzer with 100 Hz signal	800Hz at 1.0 sec on/off	110111	800 cont
6	LF Buzzer with 100 Hz signal	800Hz at 1.0 sec on/off	110110	800 cont
7	LF Buzzer with 100 Hz signal	800Hz at 1.0 sec on/off	110011	800 cont
8	LF Buzzer with 100 Hz signal	800Hz at 1.0 sec on/off	110010	800 cont
9	Alarm tone 100 Hz	800/900Hz at 1Hz	101111	800 cont
10	Australian slow whoop	Intermittent 970Hz 0.425ms on/0.425ms off	101110	800/900 3.75 sec on 0.425ms off
11	Dutch sweep tone	970Hz cont	101011	0.5 sec on 0.5 sec off
12	Alarm tone 100 Hz	800/900Hz at 2Hz	101010	800 cont
13	Alarm tone 100 Hz	800/900Hz at 2Hz	100111	800 cont
14	Alarm tone 100 Hz	800/900Hz at 2Hz	100110	800 cont
15	Alarm tone 100 Hz	800/900Hz at 2Hz	100011	800 cont
16	US Temporal Pattern 1F	800Hz for 0.5 sec on 0.5 sec off	100010	800 cont
17	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	011111	800 cont
18	800/900 Hz 100 Hz 1 Hz	Intermittent 970Hz 0.425ms on/0.425ms off	011110	800 cont
19	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	011101	800 cont
20	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	011100	800 cont
21	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	011011	800 cont
22	LF Buzzer	800/900Hz at 0.5 sec	011010	800 cont
23	LF Buzzer	800Hz	010011	800 cont
24	Alarm tone 100 Hz	800/900Hz at 2Hz	010010	800 cont
25	Alarm tone 100 Hz	800/900Hz at 2Hz	001111	800 cont
26	Alarm tone 100 Hz	Intermittent 800Hz 0.425ms on / 0.425ms off	001110	800 cont
27	Alarm tone 100 Hz	Intermittent 800Hz 0.425ms on / 0.425ms off	001101	800 cont
28	Alarm tone 100 Hz	Intermittent 800Hz 0.425ms on / 0.425ms off	001100	800 cont
29	US Temporal Pattern 1F	800Hz for 0.5 sec on 0.5 sec off	000111	800 cont
30	Alarm tone 100 Hz	Intermittent 800Hz 0.425ms on / 0.425ms off	000110	800 cont
31	Alarm tone 100 Hz	Intermittent 800Hz 0.425ms on / 0.425ms off	000101	800 cont
32	Alarm tone 100 Hz	Intermittent 800Hz 0.425ms on / 0.425ms off	000100	800 cont

