


## UCHWYT DO PESZLA - BW-M / BW-P

5010.031.016

Uchwyt kątowy na peszel M16


- Kątowny uchwyt do peszla
- Materiał: stal chromowana

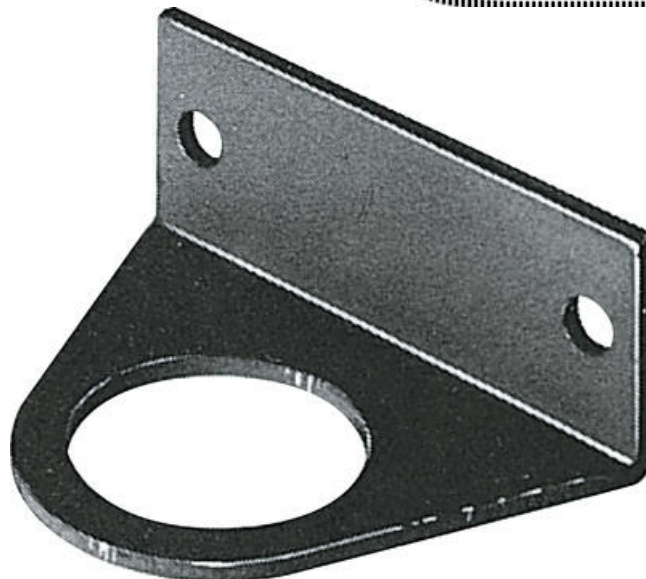

### OPIS PRODUKTU

|                  |                   |
|------------------|-------------------|
| Material         | stål, krombelagd  |
| Temperaturområde | -40°C till +220°C |

### BESTÄLLNINGSDATA



#### BW-M

| Beställningsnr | Metr.<br>EN 60423 | ø A<br>mm | B<br>mm | G<br>mm | C<br>mm | D<br>mm | E<br>mm | ø F<br>mm | Vikt<br>kg/100<br>±10 % | Förpacknings-<br>storlek<br>m |
|----------------|-------------------|-----------|---------|---------|---------|---------|---------|-----------|-------------------------|-------------------------------|
| 5010.031.016   | M 16 x 1,5        | 17,0      | 22,0    | 38,0    | 50,0    | 40,0    | 20,0    | 4,5       | 2,80                    | 25                            |
| 5010.031.020   | M 20 x 1,5        | 21,0      | 22,0    | 38,0    | 50,0    | 40,0    | 20,0    | 4,5       | 2,60                    | 25                            |
| 5010.031.025   | M 25 x 1,5        | 26,0      | 27,0    | 46,9    | 60,0    | 50,0    | 20,0    | 4,5       | 3,60                    | 25                            |
| 5010.031.032   | M 32 x 1,5        | 33,0      | 32,0    | 56,9    | 70,0    | 60,0    | 20,0    | 4,5       | 4,40                    | 25                            |
| 5010.031.040   | M 40 x 1,5        | 41,0      | 37,0    | 67,0    | 80,0    | 70,0    | 20,0    | 4,5       | 5,20                    | 25                            |
| 5010.031.050   | M 50 x 1,5        | 51,0      | 40,0    | 78,4    | 90,0    | 80,0    | 20,0    | 4,5       | 6,10                    | 25                            |

|                |                 |           |         |         |         |         |         |           |                         |                               |
|----------------|-----------------|-----------|---------|---------|---------|---------|---------|-----------|-------------------------|-------------------------------|
| 5010.031.063   | M 63 x 1,5      | 64,0      | 42,0    | 83,0    | 90,0    | 80,0    | 20,0    | 4,5       | 7,20                    | 25                            |
|                |                 |           |         |         |         |         |         |           |                         |                               |
| BW-P           |                 |           |         |         |         |         |         |           |                         |                               |
| Beställningsnr | PG<br>DIN 40430 | ø A<br>mm | B<br>mm | G<br>mm | C<br>mm | D<br>mm | E<br>mm | ø F<br>mm | Vikt<br>kg/100<br>±10 % | Förpacknings-<br>storkek<br>m |
| 5010.027.016   | 16              | 23,0      | 22,0    | 38,0    | 50,0    | 40,0    | 20,0    | 4,5       | 2,70                    | 25                            |
| 5010.027.021   | 21              | 29,0      | 27,0    | 46,9    | 60,0    | 50,0    | 20,0    | 4,5       | 3,70                    | 25                            |
| 5010.027.029   | 29              | 37,5      | 32,0    | 56,9    | 70,0    | 60,0    | 20,0    | 4,5       | 4,60                    | 25                            |
| 5010.027.036   | 36              | 47,5      | 37,0    | 67,0    | 80,0    | 70,0    | 20,0    | 4,5       | 5,40                    | 25                            |
| 5010.027.048   | 48              | 60,0      | 40,0    | 78,4    | 90,0    | 80,0    | 20,0    | 4,5       | 6,40                    | 25                            |

SPECYFIKACJA TECHNICZNA

|                        |                       |
|------------------------|-----------------------|
| Gwint                  | M16x1,5 met. EN 60423 |
| Masa kg/100 szt ±10%   | 2,8                   |
| Materiał               | Stal, Chromowane      |
| Max. temperatura pracy | 220 °C                |
| Min. temperatura pracy | -40 °C                |
| Wielkość opakowania    | 25 szt                |