


## 828325XX SILNIK DC Z PRZEKŁADNIĄ WALCOWĄ

828325XX

Przekładnia walcowa GDR2, 33W, 12/24Vdc, 6?  
14obr/min, maks. 6Nm

- Napięcie zasilania 12/24 V DC
- Maks. moment 6 Nm, moc nominalna 33 W
- Zakres dostępnych prędkości: od 6 do 14 obr/min
- Zgodność z UL
- Kompaktowa budowa

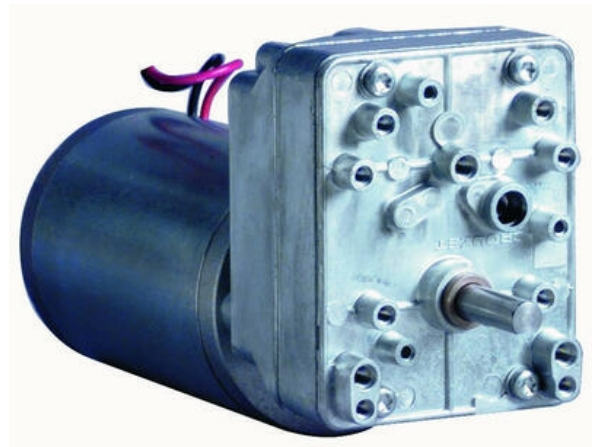

### OPIS PRODUKTU

Standard DC motor with gearbox for low speed, high torque applications.

The DC motor by nature offers a very high starting torque.

Good quality gearbox lubricated for life for high performance.

Options for a bespoke solution include, different power connections, EMC filter, encoder options & mechanical/electrical adaptations.


\* Smaller length motor for lower power applications available if required.

### SPECYFIKACJA TECHNICZNA

<b>Dostępne prędkości</b>	6rpm→14rpm
<b>Masa</b>	1,4 kg
<b>Moc</b>	33 W
<b>Moment maksymalny</b>	6
<b>Napięcie zasilania</b>	12 V DC, 24 V DC
<b>Przełożenie</b>	i=130→338:1
<b>Średnica wałka</b>	8 mm
<b>Stopień ochrony IP</b>	IP20


# Curves

## Curve: torque/nominal speed

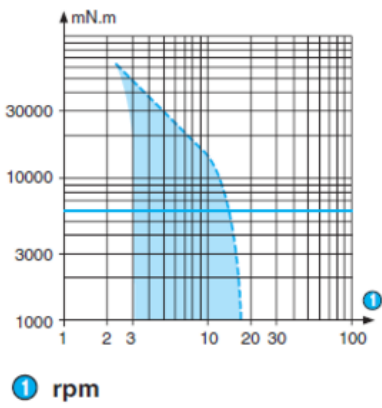

### Dimensions


828325

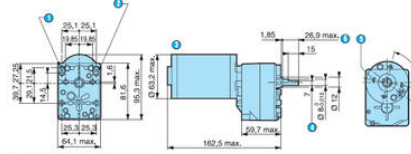

- 1 3 holes M5 at 120° depth 7.5 mm
- 2 8 holes M4 depth 7.5 mm
- 3 Lead length 200 mm
- 4 7 across flats
- 5 4 holes M5 over Ø 40 depth 7 mm
- 6 Shaft pushed-in


# Curves

## Curve: torque/nominal speed

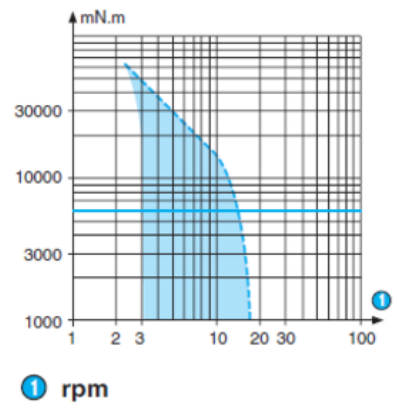

### Dimensions

828325

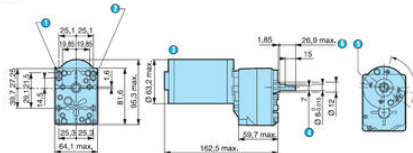

- 1 3 holes M5 at 120° depth 7.5 mm
- 2 8 holes M4 depth 7.5 mm
- 3 Lead length 200 mm
- 4 7 across flats
- 5 4 holes M5 over Ø 40 depth 7 mm
- 6 Shaft pushed-in