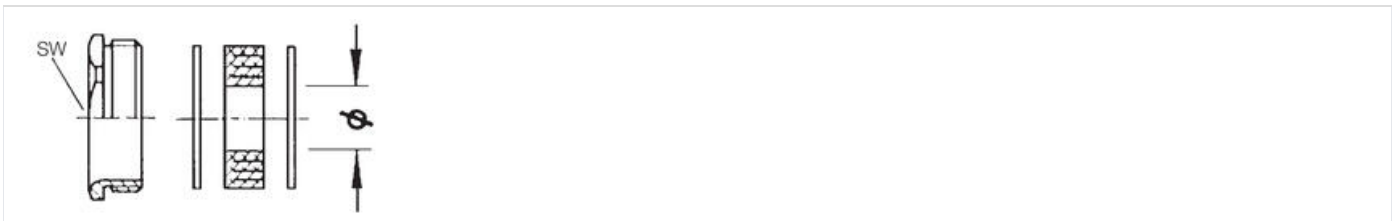


DŁAWIKI0321.000.007
Dławik PG 7**Pushing Performance**
Since 1945**OPIS PRODUKTU**

Aby otrzymać odpowiednio wysoką ochronę (IP65) wymagane jest użycie dławików z uszczelkami.

WYMIARY**NUMERY KATALOGOWE**

Nr katalogowy	SW	Ø min.	Ø max.	Opis
09000005013	18	6,5	12	Pg11
09000005014	20	6,5	13,5	Pg13,5
09000005015	22	6,5	16	Pg16
09000005016	28	9	20	Pg21
09000005017	37	17	28	Pg29
09000005018	47	23	34	Pg36
09000005019	54	29	40	Pg42

HSK-M dławik



Poliamid, IP68, zakres temperatur -20 °C do +100 °C

Nr katalogowy		Gwint	Ø	Długość	Szerokość	Wielkość
szary	czarny	metryczny	kabla	gwintu	klucza	opakowania
0321.001.012	0321.011.212	M12x1,5	3-6	6,0	15	100
0321.001.016	0321.011.216	M16x1,5	5-10	6,0	20	100
0321.001.020	0321.011.220	M20x1,5	8-13	8,0	24	100
0321.001.025	0321.011.225	M25x1,5	11-17	8,0	29	50
0321.001.032	0321.011.232	M32x1,5	15-21	10,0	36	25
0321.001.040	0321.011.240	M40x1,5	19-28	10,0	46	10
0321.001.050	0321.011.250	M50x1,5	26-35	12,0	55	5
0321.001.063	0321.011.263	M63x1,5	35-48	12,0	68	5

HSK-P dławik



Poliamid, IP68, zakres temperatur -20 °C do +100 °C

Nr katalogowy		Gwint	Ø	Długość	Szerokość	Wielkość
szary	czarny	PG	kabla	gwintu	klucza	opakowania
0321.000.007	0321.000.207	7,0	3-6,5	8,0	15	100
0321.000.009	0321.000.209	9,0	4-8	8,0	19	100
0321.000.011	0321.000.211	11,0	5-10	8,0	22	100
0321.000.013	0321.000.213	13,5	6-12	9,0	24	100
0321.000.016	0321.000.216	16,0	10-14	10,0	27	50
0321.000.021	0321.000.221	21,0	13-18	11,0	33	50
0321.000.029	0321.000.229	29,0	18-25	11,0	42	25
0321.000.036	0321.000.236	36,0	22-32	13,0	53	10
0321.000.048	0321.000.248	48,0	34-44	14,0	65	5

HSM-M dławik



Mosiądz nikielowany, IP68, zakres temperatur -20 °C do +100 °C

Nr katalogowy	Gwint metryczny	Ø kabla	Długość gwintu	Szerokość klucza	Wielkość opakowania
0522.001.012	M12x1,5	3-6	5,0	14	100
0522.001.016	M16x1,5	5-9	5,0	17	100
0522.001.020	M20x1,5	9-13	6,0	22	100
0522.001.025	M25x1,5	11-16	7,0	27	50
0522.001.032	M32x1,5	14-21	8,0	34	25
0522.001.040	M40x1,5	19-27	8,0	43	10
0522.001.050	M50x1,5	24-35	9,0	55	5
0522.001.063	M63x1,5	32-48	10,0	65	5

HSM-P dławik



Mosiądz niklowany, IP68, zakres temperatur -20 °C do +100 °C

Nr katalogowy	Gwint PG	Ø kabla	Długość gwintu	Szerokość klucza	Wielkość opakowania
0522.000.001	7,0	3-6,5	5,0	14	100
0522.000.003	9,0	4-8	6,0	17	100
0522.000.006	11,0	5-10	6,0	20	50
0522.000.010	13,5	6-12	6,5	22	50
0522.000.013	16,0	10-14	6,5	24	50
0522.000.015	21,0	13-18	7,0	30	50
0522.000.016	29,0	18-25	8,0	40	25
0522.000.017	36,0	24-32	9,0	50	10
0522.000.019	48,0	34-44	10,0	64	5