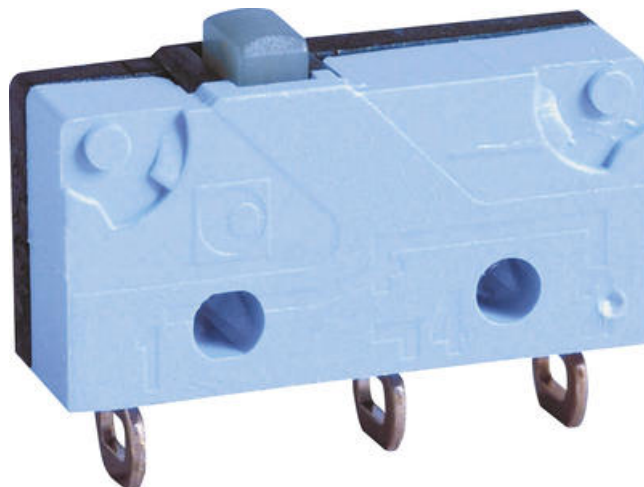


CROUZET - MIKROPRZELĄCZNIK V4

83170002



Mikroprzełącznik V4 NO+NC styki W2

- Prąd znamionowy od 0.1-10A przy 250VAC
- Dostępny aktywator w kształcie grzybka
- Zgodne z normą EN 61058 i UL 1054
- Dwie opcje montażu aktywatora


**OPIS PRODUKTU****SPECYFIKACJA TECHNICZNA**

Histeresa maks.	0,15 mm
Krótkotrwały prąd cieplny przy 250 V AC	12,5 A
Maks. dopuszczalne przebiegnięcie	10 N
Min. przejście poza punkt pracy	0,5 mm
Minimalna siła zwalniająca	0,3 N
Podłączenie	W2
Pozycja początkowa	9,2 mm
Prąd nominalny przy 250 V AC	10 A
Przerwa stykowa	0,4 mm
Punkt pracy	8,4 ±0,3 mm
Siła całkowita maks.	1,8 N
Siła załączająca Max.	1,5 N
Stopień ochrony IP	IP40
Trwałość mechaniczna	10 ⁷ cykli
Typ styków	Styk przełączny
Zakres temperatur do	125 °C
Zakres temperatur od	-40 °C


W2

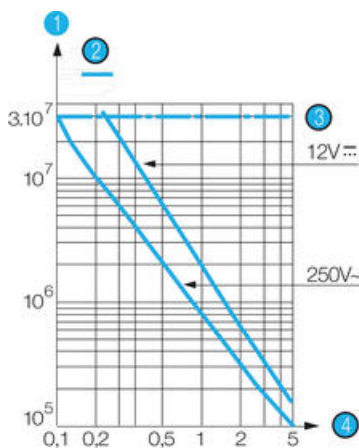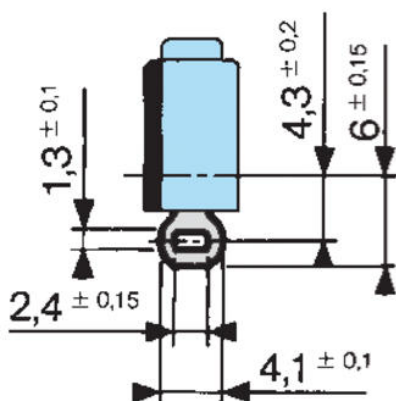

- 1 Number of cycles
- 2 Resistive load
- 3 Mechanical life
- 4 Current (A)

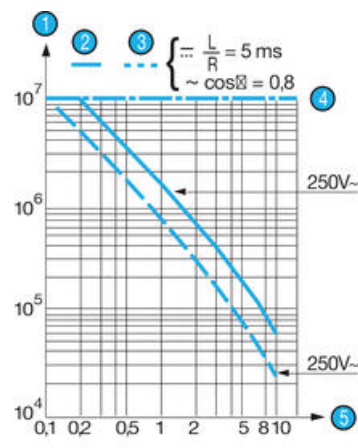

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

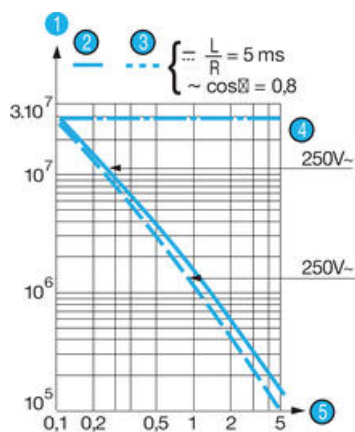

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

Electrical function

Partially




Breaking



Conclusion




83 170
Asymmetric version

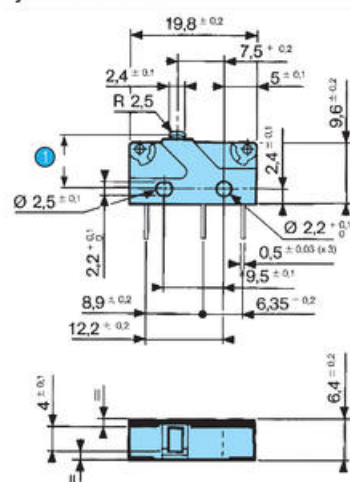


1 OL = 7.6


Mounted with M2 screws
Recommended tightening torque: 2 cm daN

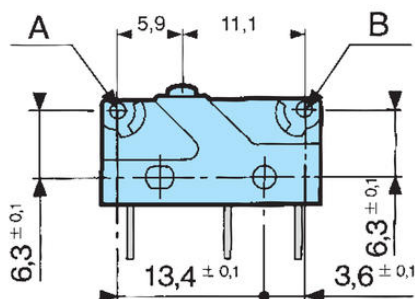


W2




W7A5




X1 - X1S




X2 - X2S




X3 - X3S




83 170 Symmetrical version

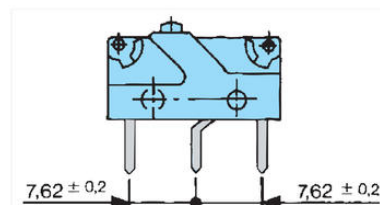

170 E
Arm with roll

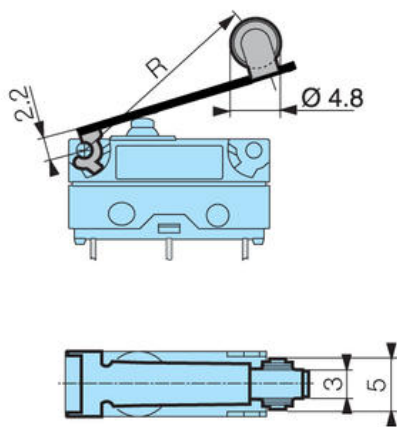

170 A
Straight-arm

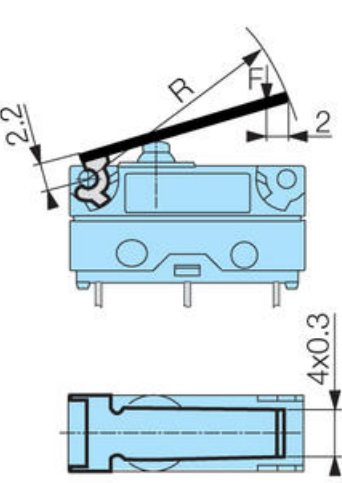

170 F
Arm with simulated scroll

