



DMS -V Series (NPN Output)



At a glance

- NPN output
- Transmission distance : 1m / 3m
- Communication capacity : 4 BITS / 8 BITS
- Transmission direction : Head-ON / Side-ON
- Compact (size : 50x50x20mm, weight : 280g)

DMS - - V

- 1 : Transmission distance 1m
- 2 : Transmission distance 3m
- A : 4 BITS
- B : 8 BITS
- G : Head-ON
- H : Side-ON

Transmission direction

Head-ON



Side-ON




Product description

- A device that uses LED light to send and receive binary data over short distances.
- Transmission area can be adjusted with the volume.
- Compact. Easy to install on mobile devices and systems, such as AGVs and stations.

Visit our website



Composition

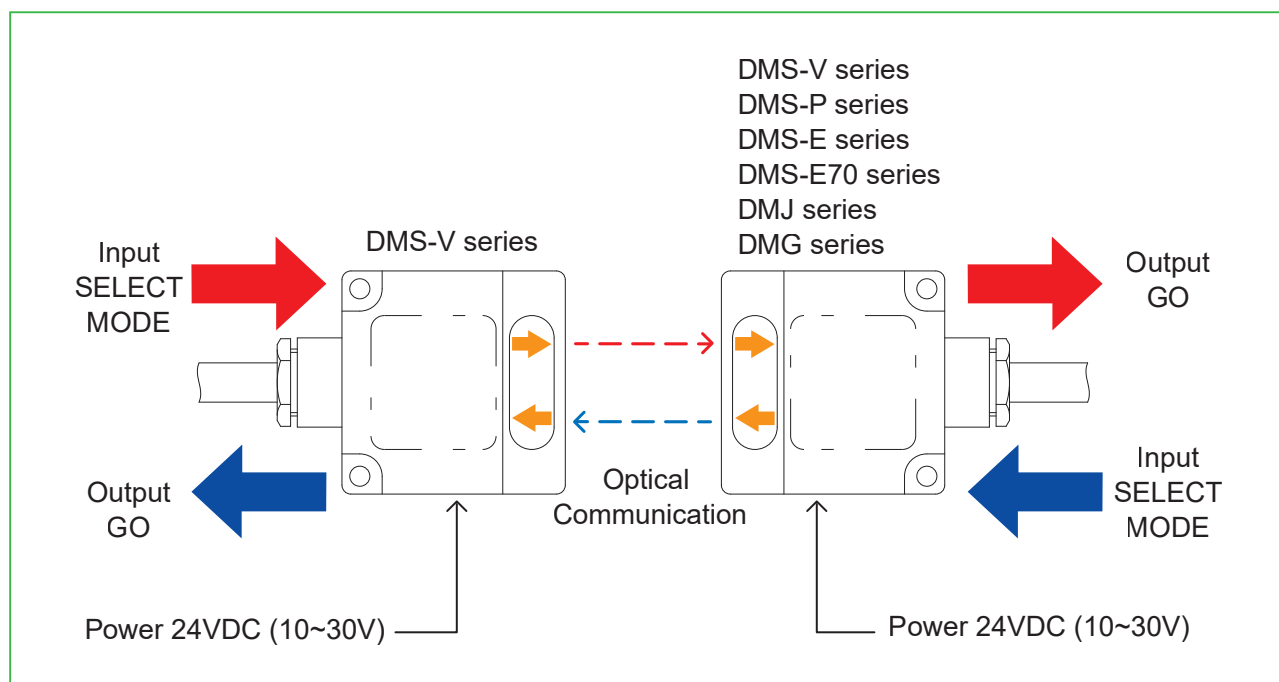

Specification

Head-ON Side-ON	DMS-GA1-V DMS-HA1-V	DMS-GA2-V DMS-HA2-V	DMS-GB1-V DMS-HB1-V	DMS-GB2-V DMS-HB2-V
Communication capacity	4 BITS		8 BITS	
Transmission distance (0m~)	1m	3m	1m	3m
Directional angle	± 15°	± 5°	± 15°	± 5°
Output type	NPN output			
Supply voltage	24VDC (10 to 30VDC)			
Current consumption	100mA Max.			
Light source	LED (850nm)			
Transmission time	40msec or less			
Input	ON current 2.5mA or more, OFF current 1mA or less, Operating threshold current 1.5 to 2mA			
Output	NPN open-collector (30VDC, 50mA or less, Residual voltage 1.8V or less)			
Ambient illuminance	4,000lx or less (Incandescent lamp)			
Ambient temperature and humidity	-10~50℃, 85%RH or less			
Shock resistance	500m/s ² , each 10 time in X, Y and Z directions			
IP protection	IP64			
Weight	280g			
Size W x D x H (mm)	50 x 50 x 20			

Connection


4 BITS type (DMS-□A□-V)

Cable information : Cable length : 2 m

Conductor size : 25 AWG

Cable outer diameter (OD) : 7.0 mm

Color	Function
Black	IN 1
Brown	IN 2
Red	IN 3
Orange	IN 4
White / Yellow	MODE ^{*1}
Yellow	SELECT ^{*2}
White / Blue	Non connection
Green	OUT 1

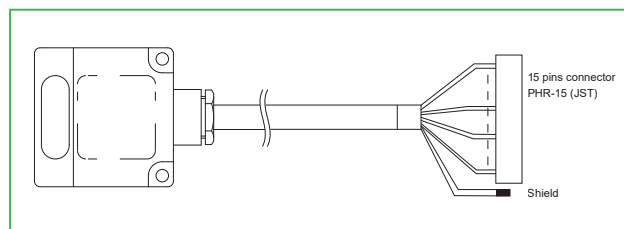

Color	Function
Blue	OUT 2
Purple	OUT 3
Gray	OUT 4
White	GO ^{*3}
Yellow / Green	COM (0V)
Yellow / Red	+VIN
Yellow / Black	-VIN (0V)
Shield	


8 BITS type (DMS-□B□-V)

Cable information : Cable length : 2 m

Conductor size : 25 AWG

Cable outer diameter (OD) : 8.2 mm

Color	Function
Pale blue	COM (0V)
Pink	MODE ^{*1}
White	SELECT ^{*2}
White / Black	GO ^{*3}
Brown	IN 1
Brown / Black	OUT 1
Red	IN 2
Red / Black	OUT 2
Orange	IN 3
Orange / Black	OUT 3
Yellow	IN 4
Yellow / Black	OUT 4

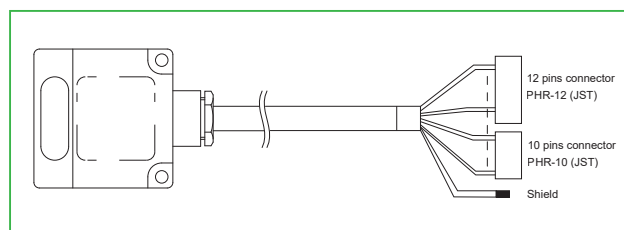

Color	Function
Green	IN 5
Green / Black	OUT 5
Blue	IN 6
Blue / Black	OUT 6
Purple	IN 7
Purple / Black	OUT 7
Gray	IN 8
Gray / Black	OUT 8
Pink / Black	+VIN
Pale blue / Black	-VIN
Shield	

*1 MODE input

This is to choose transmission / reception mode when standing by

*Transmission stand-by mode by opened between mode and I/O COM

*Reception stand-by mode by short-circuited between mode and I/O COM

*2 SELECT input

This is to stop transmission / reception optionally by outer signal

*Operating by opened between select and I/O COM

*Stopping by short-circuited between select and I/O COM

*3 GO output


This is to check correct optical signal

*ON when receiving correct data


*OFF when interrupting optical axis (Not-receiving)

I/O circuit

Input

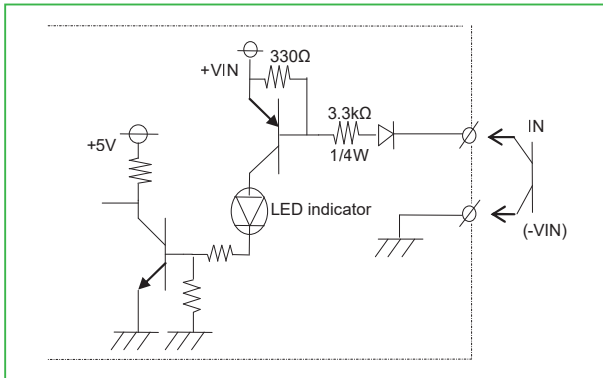

Output

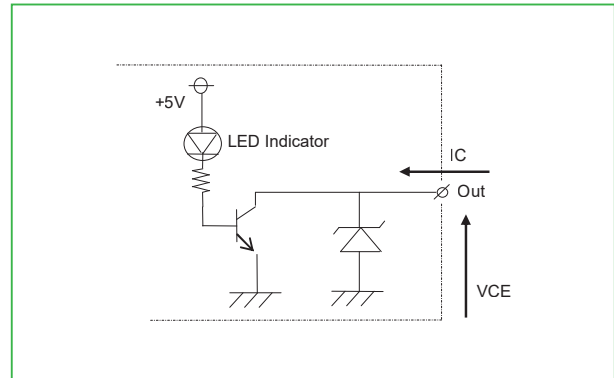

External dimension

